



Federal Government - AbilityOne/SKILCRAFT
Commercial Door Hardware

TABLE OF CONTENTS

TABLE OF CONTENTS

MORTISE LOCKS – OVERVIEW / CROSS REFERENCE GUIDE	2
GRADE 1 – MR SERIES	3
FUNCTIONS	4
PDQ MODEL NUMBER / SKILCRAFT NSN	5
CYLINDRICAL LOCKS – OVERVIEW	6
GRADE 1 – GT SERIES	7
GRADE 1 – SCHOOL SECURITY SOLUTIONS	8
FUNCTIONS / CROSS REFERENCE GUIDE	9
PDQ MODEL NUMBER / SKILCRAFT NSN	10
EXIT DEVICES - OVERVIEW / PDQ MODEL NUMBER / SKILCRAFT NSN	11-12
DOOR CLOSERS - OVERVIEW	13
GRADE 1 - 7100 SERIES	14
GRADE 1 - 5500 SERIES	15
CROSS REFERENCE GUIDE / PDQ MODEL NUMBER / SKILCRAFT NSN	16

GRADE 1

INNOVATIVE DESIGN. PHENOMENAL PERFORMANCE.

Tested to 11 million cycles and still counting! That's how PDQ backs up its claim to manufacture some of the toughest hardware in the market. Our mortise locks are built to withstand the rigors of daily use without fail, keeping people and their assets safe while delivering consistent reliable performance. Easy to install, and simple to repair and maintain. That means fewer callbacks for you and total safety and security for your customers.

COMPREHENSIVE OFFERING

MR MECHANICAL



APPLICATIONS

Extremely versatile and regularly used in education, healthcare, office, retail, and other commercial applications.

CROSS REFERENCE


ANSI #	PDQ FUNCTION	HAGAR	FALCON	ARROW	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
F07	MR115	3880E	MA581	BM/AM12	45HD	ML2057	M9080	8204	L9080	8805
F04	MR116	3850E	MA521	BM/AM22	45HA	ML2051	M9050	8205	L9050	8807
F01	MR126	3810E	MA101	BM/AM01	45HN	ML2010	M9010	8215	L9010	8801
F13	MR136	3856E	MA571	BM/AM19	45HT	ML2065	M9956	8225	L9456	8822
F20	MR162	3853E	MA531	BM/AM20	45HAB	ML2067	M9953	8243	L9453	8847
F22	MR176	3840E	MA321	BM/AM26	45HLT	ML2060	M9040	8265	L9040	8862
F06	MR113	N/A	MA551	N/A	45HR/HB	ML2055	M9076	8289	L9076	AU8800
F08	MR117	N/A	MA621	BM/AM21	45HBA	ML2048	N/A	8247	N/A	N/A
F14	MR137	N/A	MA371	BM/A/31	45HG	ML2017	M9966	8226	L9466	AU8860-2FL
F11	MR158	N/A	N/A	N/A	N/A	N/A	M9957	N/A	N/A	AU8800
F21	MR135	N/A	MA541	BM/AM13	45HB	ML2024	M9973	8224	L9473	AU8860FL
-	MR154	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

LEVER	PDQ	HAGAR	FALCON	ARROW	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
PHL LEVER	PHILADELPHIA	WITHNELL	D DANE	X	15	NS NEWPORT	LR	L	06 RHODES	AU AUGUSTA
DAL LEVER	DALLAS	CHARLES	K KIM	HS	3	LS LUSTR	LT	J	03TUBULAR	CR CARMEL

GRADE 1

BUILT TO LAST.

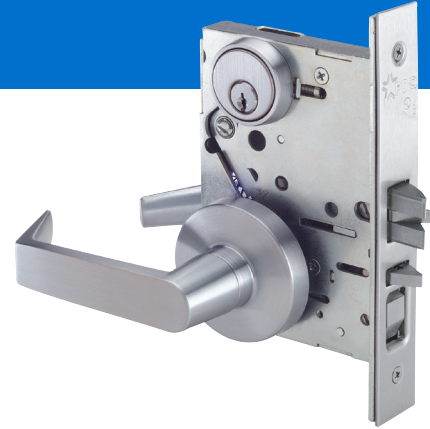- Cycle Tested – Over 11X BHMA standard and counting!
- Versatile – Single cam for all locking functions
- Available in multiple escutcheon widths
- Lifetime Warranty



PRODUCT SPECIFICATIONS

FOR DOORS:	• 1-3/4" standard, 2" and 2-1/4" special order from factory.
BACKSET:	• 2-3/4"
CASE:	• 12-gauge cold rolled steel mechanism • Dichromated for corrosion resistance
ARMOR FRONT:	• Beveled 1/8" on 2" • 625 (US26) & 630 (US32D) use stainless steel as base material, all other finishes use stainless steel or brass as base material
STRIKE:	• Handed Curved Lip Strike • 625 (US26) & 630 (US32D) use stainless steel as base material, all other finishes use stainless steel or brass as base material
LATCHBOLT:	• 3/4" Throw • Investment Cast Stainless Steel • Anti-friction
DEADBOLT:	• 1" Throw • Investment Cast Stainless Steel
HAND:	• Most functions field reversible. Specify handing for strikes, consult factory for details
TRIM:	• F trim- forged brass levers, escutcheons and turns. • J Standard and J Wide Trim - stainless steel escutcheon and levers, PHL, MEM, MIA and BSN are solid levers, ORL, DAL and CHI are tube levers. Ball Knobs are wrought.
KEYING:	• Keyed to your needs, Keys, keyway, IC core, cylinder and keying information on pages 36-37.
FINISHES:	• J Standard and J Wide Trim - 629 (US32), 630 (US32D) • Antimicrobial Coating available on 630 (US32D) for J and J Wide Trim.
COUNTRY OF ORIGIN:	• Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act.

WARRANTY

WARRANTY:	• Lifetime Limited Warranty
-----------	-----------------------------



LISTINGS AND CERTIFICATIONS

CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA 156.13 Operational Grade 1 and Security Grade 1 • Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7') • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
--	---







GRADE 1

FUNCTIONS – NON KEYED

FUNCTION	FUNCTION NUMBER	OUTSIDE INSIDE	DESCRIPTION	ANSI NUMBER
Passage	MR126™		<ul style="list-style-type: none"> Latchbolt operated by lever from either side 	F01
Privacy	MR176™		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Thumbturn inside locks/unlocks outside lever Emergency coin turn outside unlocks outside lever Closing door unlocks outside lever 	F22

FUNCTIONS – KEYED

FUNCTION	FUNCTION NUMBER	OUTSIDE INSIDE	DESCRIPTION	ANSI NUMBER
Storeroom	MR115		<ul style="list-style-type: none"> Latchbolt operated by lever from inside Rigid outside lever Key outside retracts latchbolt Auxiliary latch deadlocks latchbolt 	F07
Office	MR116		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Key outside retracts latchbolt Toggle locks/unlocks outside lever Auxiliary latch deadlocks latchbolt 	F04
Corridor	MR136		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Thumbturn inside extends/retracts deadbolt Auxiliary latch deadlocks latchbolt Inside lever simultaneously retracts latchbolt and deadbolt Key outside extends/retracts deadbolt 	F13
Dormitory or Exit	MR162		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Key outside retracts latchbolt Thumbturn inside extends/retracts deadbolt Auxiliary latch deadlocks latchbolt Toggle locks/unlocks outside lever Key outside extends/retracts deadbolt Inside lever simultaneously retracts latch bolt and deadbolt 	F20

GRADE 1

SKILCRAFT NSN	PDQ Model Number
5340-00-NIB-0263	MR 113 PJEW 630
5340-00-NIB-0264	MR 113 KJEW 630
5340-00-NIB-0265	MR 113 DJEW 630
5340-00-NIB-0266	MR 117 PJEW 630
5340-00-NIB-0267	MR 117 KJEW 630
5340-00-NIB-0268	MR 117 DJEW 630
5340-00-NIB-0269	MR 137 PJEW 630
5340-00-NIB-0270	MR 137 KJEW 630
5340-00-NIB-0271	MR 137 DJEW 630
5340-00-NIB-0272	MR 158 PJEW 630
5340-00-NIB-0273	MR 158 KJEW 630
5340-00-NIB-0274	MR 158 DJEW 630
5340-00-NIB-0275	MR 135 PJEW 630
5340-00-NIB-0276	MR 135 KJEW 630
5340-00-NIB-0277	MR 135 DJEW 630
5340-00-NIB-0137	MR 115 PJEW 630
5340-00-NIB-0278	MR 115 KJEW 630
5340-00-NIB-0279	MR 115 DJEW 630
5340-00-NIB-0138	MR 116 PJEW 630
5340-00-NIB-0280	MR 116 KJEW 630
5340-00-NIB-0281	MR 116 DJEW 630
5340-00-NIB-0139	MR 126 PJEW 630
5340-00-NIB-0282	MR 126 KJEW 630
5340-00-NIB-0283	MR 126 DJEW 630
5340-00-NIB-0140	MR 136 PJEW 630
5340-00-NIB-0284	MR 136 KJEW 630

SKILCRAFT NSN	PDQ Model Number
5340-00-NIB-0285	MR 136 DJEW 630
5340-00-NIB-0286	MR 154 PJEW 630
5340-00-NIB-0287	MR 154 KJEW 630
5340-00-NIB-0288	MR 154 DJEW 630
5340-00-NIB-0301	MR 162 PJEW 630
5340-00-NIB-0289	MR 162 KJEW 630
5340-00-NIB-0290	MR 162 DJEW 630
5340-00-NIB-0141	MR 176 PJEW 630
5340-00-NIB-0291	MR 176 KJEW 630
5340-00-NIB-0292	MR 176 DJEW 630

GRADE 1

MORE HEAVY DUTY THAN YOU CAN HANDLE

Most manufacturers' approach to lock design ends with simply meeting BHMA/ANSI standards but not PDQ. Our philosophy is to step out of the box and develop innovative designs that take our locks to the next level. We don't just meet the standard, we crush it. Our design doctrine delivers the confidence that locks are built to last, whether the application calls for resistance to high abuse or to millions of cycles of operation without any degradation in performance

COMPREHENSIVE OFFERING

GT MECHANICAL



APPLICATIONS

Extremely versatile and regularly used in education, healthcare, office, retail, and other commercial applications.

XGT135 LED ELECTRIFIED



APPLICATIONS

Electrified locks complement the mechanical offering and are typically incorporated into a wired access control system or used independently with a remote access switch.

GT LED INDICATOR

SCHOOL SECURITY SOLUTIONS

In K-12 and higher education, indicators are part of the overall security plan. The GT135LED Classroom Intruder lock is designed to allow a staff member to use the inside cylinder to lock the outside of the door. The Intruder function eliminates the need to open the door to check for a locked lever. Simply press the button on the lock and if the red LED lights up the outside lever is locked and secure. If the LED does not light up, the outside lever is unlocked.

PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	FUNCTION*	TRIM	FINISH	BACKSET	STRIKE	LEVER HOUSING
GT	115	PHL	626	234	ASA	SFL
		PHL – PHILADELPHIA (Default)				SFL – SFIC Housing less core LFL – Schalge® Compatible LFIC Housing less core (Available with PHL lever only)

GRADE 1

UNRIVALED STRENGTH & DURABILITY

- Cycle Tested – Over 3X BHMA standard
- Abusive Lever Torque Tested – Over 2X BHMA standard
- 41 Degree Lever Rotation – Reduced rotation = less wear/longer life
- 25-Year Warranty



PRODUCT SPECIFICATIONS

FOR DOORS:	• 1-3/4" to 2-1/4" thick • Preset for 1-3/4" door
APPLICATION:	• Secure installation using a through bolting process
DOOR PREP:	• Standard ANSI A156.115 (161 plus through bolt holes) for Cylindrical Locks
BACKSET:	• 2-3/4" Standard. 3-3/4" and 5" Optional (Ordered from factory only)
CHASSIS:	• Heavy duty zinc pressure cast, investment cast, chromated cold rolled steel, stainless steel and EZAC™ pressure cast mechanism. Billet Steel spindles for locking functions
FRONT:	• 2-1/4" x 1-1/8" • Stainless Steel or Wrought Brass • Beveled 1/8" in 2"
STRIKE:	• ASA standard • Stainless Steel or Wrought Brass
ROSE:	• 3-3/8" DIA Wrought
LATCHBOLT:	• 9/16" Throw Deadlocking • Anti-friction
HAND:	• Non-handed
TRIM:	• Solid Zinc diecast PHL • 41° Lever Rotation Standard with 2-3/4" backset • Wrought Brass Roses, Concealed Screws • 65° Lever Rotation Standard with 3/4" latch for double doors (Ordered from factory only) and all 3-3/4"
KEYING:	• Keyed to your needs, Keys, keyway, IC core, cylinders
FINISHES:	• 626 (US26D), Optional Antimicrobial Coating
COUNTRY OF ORIGIN:	• Proudly Assembled in the U.S.A. with U.S. and foreign material. Meets requirements of the Buy American Act

WARRANTY

WARRANTY: • Twenty-five (25) year Limited Warranty

LISTINGS AND CERTIFICATIONS

CERTIFICATIONS, LISTINGS, COMPLIANCES:

- UL/CUL 10C listed for 3 hrs, for single doors up to 4'0" x 8'0"
- Certified to ANSI/BHMA A156.2, Grade 1
- California Education Code Compliant (Functions GT135, GT135LED, GT145)
- Federal Specification FF-H-10C (Superseded by A156.2)
- Approved for Florida HVHZ (High Velocity Hurricane Zone)
- PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7')
- Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings

DECORATIVE LEVER COLLECTION



PHILADELPHIA


BOSTON



GRADE 1

EASY-TO-READ LED INDICATOR CONFIRMS THE DOOR IS LOCKED

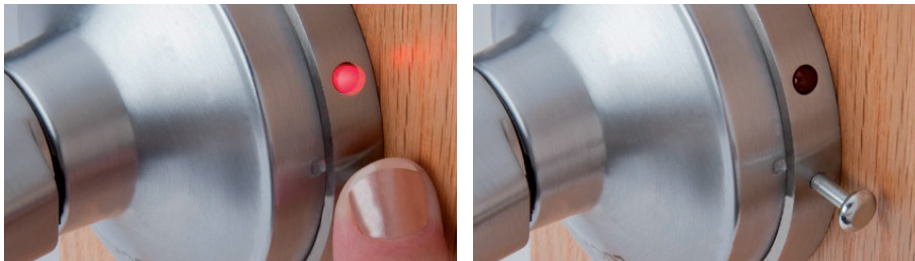- Keeps students and teachers safe and secure
- The indicator eliminates all uncertainty, no need to go outside to test the lock



To check the security of the outside lever, press the button. If the RED LED lights up, that confirms the outside lever is locked and secure. Press the button. If the RED LED does not light up, that indicates the outside lever is unlocked.

SCHOOL SECURITY SOLUTIONS

- Status Indicator Locks
- Time Out Locks
- Classroom Security Functions

CLASSROOM INTRUDER

GT 135 LED Classroom Intruder Cylindrical Lock is designed to allow a staff member to use the inside cylinder to lock the outside of the door, without compromising safety to the occupants in the room. But how does a staff member know if the outside lever is locked?

Until now, it required opening the door and checking the lever. PDQ's 135 LED Classroom Intruder function eliminates the need to open the door. Simply press the button on the lock, and... if the Red LED lights up, the outside lever is locked and secure. If the Red LED does not light up, this indicates the outside lever is not locked and secure.



FEATURES

- Complies with California Education Code (Functions GT135, GT135LED, GT145)
- Red LED (Light Emitting Diode) outside lever status indicator.
- Pushing the button located on the rose of the inside lock, Red LED illuminates indicating the outside lever is locked.
- Offered with cylinder housings compatible with Best® Small Format Inter-changeable cores, Schlage® Large Format Interchangeable cores and most others.
- Large Format Inter-changeable cores only available with PHL lever.
- Keying options available, compatible with most key systems.
- Battery life rating: 10 years*
- Battery type: CR1220
- Patented (US Patent #9,187,928)







BUILT TO LAST IN THE TOUGH CLASSROOM ENVIRONMENT

- Factory tested to over 2 million cycles (2X the ANSI/BHMA Grade 1 std)
- Lever torque tested to 2,000 in-lbs (Nearly 3X the ANSI/BHMA Grade 1 std)



GRADE 1

LOCK FUNCTIONS

FUNCTION	FUNCTION NUMBER	INSIDE OUTSIDE	DESCRIPTION	ANSI NUMBER
NON KEYED				
Storeroom	GT115		<ul style="list-style-type: none"> Latchbolt operated by inside lever or key in outside lever Outside lever always fixed 	F86
Entrance	GT116		<ul style="list-style-type: none"> Latchbolt operated by lever from either side or key in outside lever Outside lever locked by push/turn button on inside When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever When outside lever is locked by pushing and turning button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever 	F109
Passage / Closet	GT126™		<ul style="list-style-type: none"> Latchbolt operated by lever from either side at all times 	F75
Classroom Intruder	GT135		<ul style="list-style-type: none"> Latchbolt operated by lever from either side Key in either lever locks outside lever Key in either lever unlocks outside lever Inside lever always free 	F110
Privacy Bedroom / Bathroom	GT176™		<ul style="list-style-type: none"> Latchbolt operated by lever from either side or emergency release in outside lever Outside lever locked by push button on inside Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door 	F76
Entry	GT182		<ul style="list-style-type: none"> Latchbolt operated by lever from either side or key in outside lever Outside lever locked by push button on inside Outside lever unlocked by key from outside 	F82

CROSS REFERENCE

ANSI # / FUNCTION	PDQ	HAGAR	FALCON	ARROW	BEST	CORBIN	DORMA	SARGENT	SCHLAGE	YALE
F86 STORE ROOM	GT 115	3480	581	GL82	9KxxD	CL3357	C180	10G04	ND80	5405LN
F109 ENTRANCE	GT 116	3453	N/A	GL81	9KxxIN	CL3375	C173	10G54	ND73	5422LN
F75 PASSAGE	GT 126	3410	101	GL01	9KxxN	CL3310	C110	10U15	ND10	5401LN
F110 INTRUDER CLASSROOM	GT 135	3495	381	GL97	9KxxIN	CL3352	C177	10G38	ND95	5418LN
F76 PRIVACY	GT 176	3440	301	GL02	9KxxL	CL3320	C140	10U65	ND40	5402LN
F91 STORE ROOM	GT 137	N/A	N/A	N/A	N/A	N/A	N/A	N/A	ND66PD	N/A
F89 EXIT	GT 124	N/A	N/A	N/A	9K30NX	CL3140NT	N/A	10G13	ND12D	5409LN
F87 INSTITUTION	GT 128	3482	411	N/A	9K3W	CL3132	N/A	10G17	ND82PD	5430LN
F80 COMMUNICATION	GT 141	N/A	N/A	N/A	9K3S	N/A	N/A	10G30	ND72PD	5421LN
F90 DORMITORY / CORRIDOR	GT 165	3473	571	N/A	9K33KT	CL3175	C873	10G54	ND73PD	5422LN
F110 SECURITY LED	XGT 135	N/A	N/A	GL97	N/A	CL3172	N/A	N/A	N/A	N/A

PHL LEVER	PHILADELPHIA	WTS	D	SIERRA SR	15	NZD	LR	L	RHO	AU
BOS LEVER	BOSTON	ARC	Q	N/A	14	PZD	LC	P	SPA	PB

GRADE 1

SKILCRAFT NSN	PDQ Model Numbers
5340-00-NIB-0236	GT 137 PHL 626 234 ASA SFL
5340-00-NIB-0237	GT 137 BSN 626 234 ASA SFL
5340-00-NIB-0238	GT 137 PHL 626 234 ASA LFL
5340-00-NIB-0239	GT 124 PHL 626 234 ASA
5340-00-NIB-0240	GT 124 BSN 626 234 ASA
5340-00-NIB-0241	GT 128 PHL 626 234 ASA SFL
5340-00-NIB-0242	GT 128 BSN 626 234 ASA SFL
5340-00-NIB-0243	GT 128 PHL 626 234 ASA LFL
5340-00-NIB-0244	GT 141 PHL 626 234 ASA SFL
5340-00-NIB-0245	GT 141 BSN 626 234 ASA SFL
5340-00-NIB-0246	GT 141 PHL 626 234 ASA LFL
5340-00-NIB-0247	GT 165 PHL 626 234 ASA SFL
5340-00-NIB-0248	GT 165 BSN 626 234 ASA SFL
5340-00-NIB-0249	GT 165 PHL 626 234 ASA SFL
5340-00-NIB-0133	GT 116 PHL 626 234 ASA SFL
5340-00-NIB-0250	GT 116 BSN 626 234 ASA SFL
5340-00-NIB-0251	GT 116 PHL 626 234 ASA LFL
5340-00-NIB-0132	GT 115 PHL 626 234 ASA SFL
5340-00-NIB-0252	GT 115 BSN 626 234 ASA SFL
5340-00-NIB-0253	GT 115 PHL 626 234 ASA LFL
5340-00-NIB-0134	GT 126 PHL 626 234 ASA
5340-00-NIB-0254	GT 126 BSN 626 234 ASA
5340-00-NIB-0136	GT 176 PHL 626 234 ASA
5340-00-NIB-0255	GT 176 BSN 626 234 ASA
5340-00-NIB-0256	GT 182 PHL 626 234 ASA SFL
5340-00-NIB-0257	GT 182 BSN 626 234 ASA SFL
5340-00-NIB-0258	GT 182 PHL 626 234 ASA LFL
5340-00-NIB-0135	GT 135 PHL 626 234 ASA SFL
5340-00-NIB-0259	GT 135 BSN 626 234 ASA SFL
5340-00-NIB-0260	GT 135 PHL 626 234 ASA LFL
5340-00-NIB-0261	XGT 135 LED PHL 626 234ASA SFL
5340-00-NIB-0262	XGT 135 LED BSN 626 234ASA SFL

SECURITY. PERFORMANCE. FLEXIBILITY.

Exit devices are a critical part of a building's fire and life safety egress system. PDQ manufactures a full line of exit devices, including rim, vertical rod and mortise for both wide and narrow stile doors. These devices provide the best combination of simplicity, strength, durability, aesthetics, and innovation and are perfect for a vast array of applications.

6300 WIDE STILE



SKILCRAFT NSN	PDQ Model Numbers
5340-00-NIB-0144	6300R 630
5340-00-NIB-0145	6300RF 630
5340-00-NIB-0148	6310R 630
5340-00-NIB-0149	6310RF 630
5340-00-NIB-0146	6300V 630
5340-00-NIB-0147	6300VF 630
5340-00-NIB-0150	6310V 630
5340-00-NIB-0151	6310VF 630

PDQ MODEL NUMBER DESCRIPTION GUIDE

SERIES	DEVICE TYPE	SIZE	FINISH
63 - Exit Device Series	R - Rim V - Surface Vertical Rod	A - For doors up to 48" Blank - 3ft (Default)	630 - Satin Stainless Steel
63	R	F	630
00 - Hex Key Dogging 01 - Cylinder Dogging	F - Fire Listed Blank - Panic Listed (Default)	Blank - For doors up to 8ft (Surface Vertical Rod Devices only)	
DOGGING	OPENING TYPE	DOOR HEIGHT	

6300 CROSS REFERENCE GUIDE

TYPE	PDQ FUNCTION	HAGAR	FALCON	ARROW	BEST	CORBIN	DORMA	SARGENT	VON DUPRIN	YALE
RIM	6300R	4501 RIM	25-R	3880	2100	ED5200	9300	8800	98/99	7100
RIM FIRE	6300RF	4501 RIM FR	F-25-R	3880F	FL2100	ED5200A	F9300	12-8800	98/99 F	7100F
SURFACE VERTICAL ROD	6300V	4501SVR	25-V	3700	2200	ED5400	9400	8700	98/9927	7110
SURFACE VERTICAL ROD FIRE	6300VF	4501SVRFR	F-25-V	3700FSIERRA	FL2200	ED5400A	F9400	12-8700	98/9927-F	7110F

GRADE 1

RIM, SURFACE VERTICAL ROD, CONCEALED VERTICAL ROD, MORTISE

- Simple design. Fewer moving parts = reduced wear/longer life
- Compatible with 161 Door Prep
- Easy field reversible handing without opening lock case
- Designed to fit ANSI 115.1 door pocket prep
- 10-Year Warranty



PRODUCT SPECIFICATIONS

CHASSIS:	• Corrosion resistant plated steel
RAIL:	• Extruded aluminum • Specify 630F for full stainless tactile surfaces (roll formed)
STRIKE:	• ASA type
LOCK:	• Mortise, 13 gauge steel, dead locking, 3/4" throw
LATCH:	• RIM (R) – Pullman with dead latching, stainless steel, 3/4" throw • SURFACE (V) AND CONCEALED (CV) VERTICAL ROD) – Top Latch-Pullman with dead latching 5/8" throw - Bottom Latch – Pullman with 5/8" throw, held retracted during door swing • MORTISE (M) – Stainless steel dead locking with 3/4" throw
BACKSET:	• 2-3/4" backset, compatible with 161 prep. CV requires a custom prep
HAND:	• Device is non-handed • Trim is non-handed or field reversible
DOGGING:	• Hex key dogging standard • Cylinder dogging optional • Dogging not available on fire listed devices • Dogging kit available for field conversions (3' and 4' devices)
MINIMUM STILE WIDTH:	• 4-1/4"
DOOR THICKNESS:	• 1-3/4" standard, others vary by trim selection
DOOR WIDTH:	• Standard for 3 ft doors, option available for doors up to 4 ft width
FINISHES:	• 605 - Polished Brass, 606 - Satin Brass, 613 - Oil Rubbed Bronze, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Tactile Surfaces • Optional Anti Microbial Coating available on 626 and 630 finishes only
FASTENERS:	• Includes sex nuts, machine screws and wood screws
VERTICAL RODS:	• V/CV – stock for 7' doors standard. Extension rods available for doors up to 10'.

WARRANTY

WARRANTY: • Ten (10) year limited warranty

ELECTRONIC ACCESS CONTROL OPTIONS:

- Motorized Latch Retraction • Stand Alone Key Pad Trim • Motorized Locking/Unlocking Trim • Alarmed Exit • Latch Bolt Monitoring (rim only)
- Request to Exit/Signal Switches: One Switch (SS), Two Switches (SS2) • MLR Retrofit Kit - 81550K-MDT

LISTINGS AND CERTIFICATIONS

- CERTIFICATIONS, LISTINGS, COMPLIANCES:
- R and M - UL 305 listed for "Panic", UL 10C Listed for "Fire Exit Hardware" up to 3 hours
 - Certified to ANSI/BHMA A156.3 Grade 1
 - R and V - Approved for Florida HVHZ (High Velocity Hurricane Zone). PDQ Product Approval: FL 21376. Design load rating: ± 70.0 PSF for single door (3' x 7'), ± 65.0 PSF for pairs of doors door (6' x 7') with 9200 Series Mullion
 - Complies with ADA (Americans with Disabilities Act) and ICC/ANSA 117.1 for Accessible and Usable Buildings
 - Meets requirements of the Buy America Act



DOOR CLOSERS

GRADE 1

MAKING DOOR CONTROL EASY

PDQ offers a comprehensive line of door closers designed and manufactured to ensure superior performance and reliability. They offer the perfect combination of reliability, appearance, and durability. With a wide range of models and features, PDQ has a door closer for most applications.

7100 INSTITUTIONAL



APPLICATIONS

7100 – The 7100 Series is PDQ’s top of line heavy duty closer. It is designed for high use, high abuse institutional applications such as K-12 schools, universities and government buildings. 7100 Series closers are ideal for retrofit and new construction applications where strength and durability are required.



5500 COMMERCIAL



APPLICATIONS

5500 – Designed for maximum versatility, the 5500 Series sports a full cover and can be used for both commercial and institutional applications. This rugged workhorse is perfect for high traffic applications including federal/state buildings, assisted living facilities, hospitality, retail, religious, and medical buildings.

PDQ MODEL NUMBER DESCRIPTION GUIDE – DOOR

SERIES	SIZE	APPLICATION
71 - 7100 Series 55 - 5500 Series 31 - 3100 Series	1 - Adjustable thru BF  Plus 1-6 (For 5500 and 7100 Series) 1 - Adjustable thru BF  Plus 1-4 (For 3100 Series)	DS – Door Saver Arm DSHO – Door Saver Hold Open Arm HO – Hold Open, Tri-Pack PA – Tri-Pack (standard) SCS – Spring Cushion Stop
71 0	1 BC	PA 689
0 – Non-Delayed Action 4 – Delayed Action (In Addition To Backcheck)	BC – Adjustable Hydraulic Backcheck (Standard) Backcheck Positioning (Standard)	689 – Aluminum
DELAYED ACTION	BACKCHECK	FINISH


GRADE 1

TOP CHOICE FOR HIGH USE APPLICATIONS

- Instructions include full-size, tape-on application specific templates
- Great for retrofits. Mounting hole pattern matches LCN[®] 4040
- Meets Barrier Free/ADA Requirements
- Twenty-five (25) year Limited Warranty



PRODUCT SPECIFICATIONS

BODY:	• High strength cast iron
ARMS:	• Forged steel main arm
ARM OPTIONS:	• Hold open arm • Track/Track Hold Open • DS/DSHO heavy duty parallel stop arm • Spring Cushion Stop for DS/DSHO • EDA (Extra Duty PA Arm).
PISTON:	• 1-1/2" diameter
ADJUSTMENT:	• Hydraulic controlled closing • Hydraulic backcheck standard • Backcheck positioning valve standard (starts backcheck snubbing sooner) • Optional delayed action (in addition to backcheck)
ADJUSTMENT VALVES:	• All Adjustment Valves are STAKED to prevent removal during adjustment.
SIZE:	• Adjustable BF through 6 
MOUNTING Retrofit:	• Mounting hole pattern retrofits LCN [®] 4040 • Tri-packed for regular, top jamb and parallel arm installations • Includes sex nuts/bolts and screws for wood/metal doors/frames • Self drilling self tapping screws available
COVER:	• Full plastic cover standard, optional full metal cover available
FINISHES:	ARCHITECTURAL & PAINTED • 689 – Aluminum, 695 – Duro Bronze SPRING CUSHION STOP • 630 – Satin Stainless Steel (PVD)

WARRANTY

WARRANTY:	• Twenty-five (25) year Limited Warranty
-----------	--

LISTINGS AND CERTIFICATIONS



5500 SERIES


COMMERCIAL FULL FEATURED CLOSER

GRADE 1

- Perfect for stocking distributors; tri-packed, size range BF through 6
- Great for retrofits. Mounting hole pattern matches Norton 8300/8500 and Yale 3300/3500
- 25-Year Warranty



PRODUCT SPECIFICATIONS

BODY:	• Cast high strength aluminum alloy body
ARM OPTIONS:	• Hold open arm • DS/DSHO heavy duty parallel stop arm • Spring Cushion Stop for DS/DSHO • EDA/EDAHO Extra Duty PA Arm • Track/Track Hold Open
ADJUSTMENT:	• Hydraulic controlled closing • Separate hydraulic backcheck standard • Optional adjustable delayed action (in addition to backcheck)
RETROFIT:	• Common 12" x 3/4" mounting hole pattern retrofits Norton 8300/8500® and Yale 3300/3500
SIZE:	• Adjustable BF through 6 
MOUNTING:	• Includes sex nuts/bolts and screws for wood/metal doors/frames • Tri-packed for regular, top jamb and parallel arm installations
COVER:	• 5300 Series - Streamline plastic cover (non-handed) • 5500 Series - Full plastic cover standard (field reversible)
FINISHES:	ARCHITECTURAL & PAINTED • 605 - Polished Brass, 625 - Polished Chrome, 689 - Aluminum, 695 - Duro Bronze, 696 - Gold SPRING CUSHION STOP • 605 - Bright Brass (PVD), 613 - Oil Rubbed Bronze (PVD), 630 - Satin Stainless Steel (PVD)

WARRANTY

WARRANTY:	• Twenty-five (25) year Limited Warranty
-----------	--

LISTINGS AND CERTIFICATIONS

CERTIFICATIONS LISTINGS COMPLIANCES:	• UL 10C listed for labeled swinging fire doors rated up to and including 3 hours • Certified to ANSI/BHMA A156.4 Grade 1 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the Buy American Act
--------------------------------------	--



DOOR CLOSERS

GRADE 1


SKILCRAFT NSN	PDQ Model Numbers
5340-00-NIB-0152	5501 BC PA 689
5340-00-NIB-0154	5501 BC HO 689
5340-00-NIB-0293	5501 BC DS 689
5340-00-NIB-0294	5501 BC DS HO 689
5340-00-NIB-0295	5501 BC SCS 689
5340-00-NIB-0153	7101 BC PA 689
5340-00-NIB-0155	7101 BC HO 689
5340-00-NIB-0296	7101 BC DS 689
5340-00-NIB-0297	7101 DS HO 689
5340-00-NIB-0298	7101 BC SCS 689
5340-00-NIB-0299	7141 BC PA 689
5340-00-NIB-0300	7141 BC DS 689

7100 SERIES – CROSS REFERENCE

	PDQ	HAGAR	FALCON	ARROW	CORBIN/ RUSSWIN	DORMA	LCN	NORTON	SARGENT	YALE
SERIES	7100	5100	SC70	DCN500	DC8000	8900	4000	7500	281	5800/4400

5500 SERIES – CROSS REFERENCE

	PDQ	HAGAR	FALCON	ARROW	CORBIN/ RUSSWIN	DORMA	LCN	YALE	SARGENT	CAL ROYAL
SERIES	5500	5200	SC850FC	DCN300	DC6200	8616FC	1450	3500	350	CR801

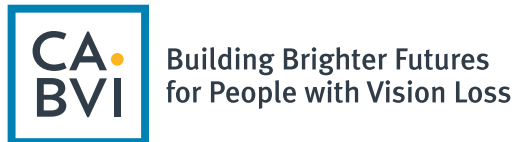

To Order: 513.487.4501

www.cincyblind.org

