PDQ powered by Spirit

BROCHURE

Table of Contents

3 **KMS Deadbolt**
4 How to Order
5 **CLS Interconnected Lock**
6 How to Order
7 **SDS Cylindrical Lock**
8 How to Order
9 **GTS Cylindrical Lock**
10 How to Order
11 **MRS Mortise Lock**
12 How to Order
13 **6EWS Exit Device Trim**
14 How to Order

KMS-SP | Deadbolt

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

EXTERIOR VIEW

INTERIOR VIEW

Features

- Built from PDQ's KM Series Heavy Duty Deadbolt
- Designed for quick installation; Fits standard 161 door prep
- Backset: 2-3/8" - 2-3/4" (Adjustable)
- Door Thickness: 1-3/8" - 1-3/4"
- RFID, PIN, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Scheduling, Logging, Obstruction, Battery Status
- Conventional, SFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries last up to 2 years or 5V DC
- -20C to 65C Operating Temperature
- 0-95% Humidity (Non - condensing)
- FCC Part 15, UL/ cUL 10C 20-Minutes
- Assembled in USA

Cylinders



Architectural Finishes

613 (US10B)
Oil Rubbed Bronze

622 (US19)
Flat Black

626 (US26D)
Satin Chromium

How to Order

QTY	SERIES	FAMILY	CREDENTIAL	FUNCTION	FINISH	BACKSET	CYLINDER	KEYWAY	KEYING
	KMS	SP	N	116	626	ADJ	D	SCC	KD
			N - NFC **NK -** NFC + Keypad **P -** Prox **PK -** Prox + Keypad		613 622	**ADJ** - Adjustable 2-3/4"–2-3/8"	See Cylinders	See Keyways	**KD -** Keyed Different **KO -** Zero Bitted **KA -** Keyed Alike **KE -** Keyed to Existing **MK -** Master Key **CMK -** Construction Master Key

CLS-SP

Interconnected

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

EXTERIOR VIEW

Features

- Built from PDQ's CL Series Interconnected Lock
- Designed for quick installation; 4" and 5-1/2" center to center options
- Backset: 2-3/4" (Adjustable)
- Door Thickness: 1-3/8" to 1-3/4"
- RFID, PIN, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Scheduling, Logging, Obstruction, Battery Status
- Conventional, SFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries last up to 2 years or 5V DC
- -20C to 65C Operating Temperature
- 0-95% Humidity (Non - condensing)
- FCC Part 15, UL/ cUL 10C 20-Minutes
- Assembled in USA

Cylinders



Architectural Finishes

613 (US10B)
Oil Rubbed Bronze

622 (US19)
Flat Black

626 (US26D)
Satin Chromium

Levers

PHILADELPHIA — PHL

BOSTON — BSN

MIAMI — MIA

ORLANDO — ORL

How to Order

QTY	SERIES	FAMILY	CREDENTIAL	FUNCTION	LEVER	FINISH	BACKSET	STRIKE	CYLINDER	KEYWAY	KEYING
	CLS	SP	N	126	PHL	626	ADJ	ASA	D	SCC	KD
			N - NFC **NK -** NFC + Keypad **P -** Prox **PK -** Prox + Keypad		**BSN** **MIA** **ORL**	**613** **622**	**ADJ** - Adjustable 2-3/4"–2-3/8"	**ASA -** ANSI/ASA (standard) **FL -** Full Lip **T -** "T" Strike	**See Cylinders**	**See Keyways**	**KD -** Keyed Different **KO -** Zero Bitted **KA -** Keyed Alike **KE -** Keyed to Existing **MK -** Master Key **CMK -** Construction Master Key

Strikes

	CODE	DESCRIPTION
	ASA	ASA Strike 1-1/4" x 4-7/8"
	T	T-Strike 1-1/8" x 2-3/4"
	FL	Full Lip Strike 1-5/8" x 2-1/4"

SDS-SP | Cylindrical Lock

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

EXTERIOR VIEW

Features

- Built from PDQ's SD Series Grade 2 Cylindrical Lock
- Designed for quick installation; Fits standard 161 door prep
- Backset: 2-3/8", 2-3/4" (standard) or 5"
- Door Thickness: 1-3/8" - 1-3/4"
- RFID, PIN, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Auto-Lock/Unlock, Scheduling, Logging, Battery Status
- Conventional, SFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries up to 2 years or 5V DC
- -20C to 65C Operating Temperature
- 0-95% Humidity (Non - Condensing)
- FCC Part 15, UL/ cUL 10C 20-Minutes
- Assembled in USA

Cylinders



Architectural Finishes

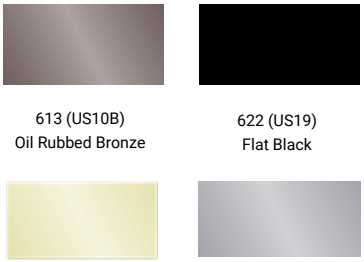

613 (US10B)
Oil Rubbed Bronze

622 (US19)
Flat Black

605 (US3)
Bright Brass

626 (US26D)
Satin Chromium

Lever Designs

PHILADELPHIA — PHL

BOSTON — BSN

MIAMI — MIA

MEMPHIS — MEM

ORLANDO — ORL

How to Order

QTY	SERIES	FAMILY	CREDENTIAL	FUNCTION	LEVER	FINISH	HANDING	BACKSET	STRIKE	CYLINDER	KEYWAY	KEYING
	SDS	SP	N	116	PHL	626	RH*	234	ASA	D	SCC	KD
			N - NFC **NK** - NFC + Keypad **P** - Prox **PK** - Prox + Keypad		**BSN** **MIA** **MEM** **ORL**	**605** **613** **622**	**LH**	2-3/4" (standard) **238** - 2-3/8" **5** - 5"	**ASA** - ANSI/ASA (standard) **FL** - Full Lip **T** - "T" Strike	**See Cylinders**	**See Keyways**	**KD** - Keyed Different **KO** - Zero Bitted **KA** - Keyed Alike **KE** - Keyed to Existing **MK** - Master Key **CMK** - Construction Master Key

Strikes

	CODE	DESCRIPTION
	ASA	ASA Strike 1-1/4" x 4-7/8"
	T	T-Strike 1-1/8" x 2-3/4"
	FL	Full Lip Strike 1-5/8" x 2-1/4"

GTS-SP | Cylindrical Lock

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

EXTERIOR VIEW

INTERIOR VIEW

Features

- Built from PDQ's World-Class GT Series Grade 1 Cylindrical Lock
- Designed for quick installation; Fits standard 161 door prep
- Backset: 2-3/4" (standard), 5" (optional)
- Door Thickness: 1-3/4" - 2-1/4"
- RFID, PIN, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Auto-Lock/Unlock, Scheduling, Logging, Lockdown
- Do not Disturb, Request to Exit, Battery Status
- Conventional, SFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries up to 2 years or 5V DC
- -20C to 65C Operating Temperature
- 0-95% Humidity (Non - Condensing)
- FCC Part 15, UL/ cUL 10C 45-Minutes
- Assembled in USA

Cylinders

Architectural Finishes

613 (US10B)
Oil Rubbed Bronze

622 (US19)
Flat Black

626 (US26D)
Satin Chromium

606 (US4)
Satin Brass

612 (US10)
Satin Bronze

Lever Designs

PHILADELPHIA — PHL BOSTON — BSN MIAMI — MIA

How to Order

QTY	SERIES	FAMILY	CREDENTIAL	FUNCTION	LEVER	FINISH	HANDING	BACKSET	STRIKE	CYLINDER	KEYWAY	KEYING
	GTS	SP	N	116	PHL	626	RH*	234	ASA	D	SCC	KD
			N - NFC **NK** - NFC + Keypad **P** - Prox **PK** - Prox + Keypad		BSN MIA	606 612 613 622	LH	2-3/4" (standard) **5** - 5"	**ASA** - ANSI/ASA (standard) **FL** - Full Lip **T** - "T" Strike	See Cylinders	See Keyways	**KD** - Keyed Different **KO** - Zero Bitted **KA** - Keyed Alike **KE** - Keyed to Existing **MK** - Master Key **CMK** - Construction Master Key

***Handed but field reversible.**

Strikes

	CODE	DESCRIPTION
	ASA	ASA Strike 1-1/4" x 4-7/8"
	T	T-Strike 1-1/8" x 2-3/4"
	FL	Full Lip Strike 1-5/8" x 2-1/4"

MRS-SP

Mortise Lock
Sectional Trim

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

Features

- Built from PDQ's World-Class MR Series Grade 1 Mortise Lock
- Designed for quick installation. Fits standard ANSI/BHMA A156.115 Door Prep
- Door Thickness: 1-3/4" (standard), 2" and 2-1/4" (optional)
- RFID, PIN, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Auto-Lock/Unlock, Scheduling, Logging
- Key Override, Latchbolt Monitor, Do not Disturb, Request to Exit, Battery Status
- Conventional, SFIC, LFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries up to 2 years or 5V DC
- -20C to 65C Operating Temperature
- 0-95% Humidity (Non - condensing)
- FCC Part 15, UL/ cUL 10C 3-hour
- Assembled in USA

Cylinders

Rose Designs



ROUND ROSE
F-TRIM

SQUARE ROSE (SR)
J-TRIM

Lever Designs

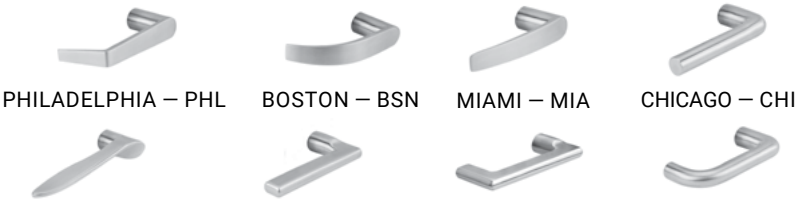

PHILADELPHIA — PHL BOSTON — BSN MIAMI — MIA CHICAGO — CHI

MEMPHIS — MEM ORLANDO — ORL LOS ANGELES — LA DALLAS — DAL

Architectural Finishes

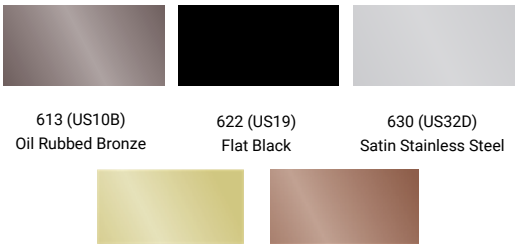

613 (US10B)
Oil Rubbed Bronze

622 (US19)
Flat Black

630 (US32D)
Satin Stainless Steel

606 (US4)
Satin Brass

612 (US10)
Satin Bronze

FUNCTION NUMBER	OUTSIDE | INSIDE	DESCRIPTION
116		• Latchbolt operated by lever from either side • Key outside retracts latchbolt. • Outside lever is momentarily unlocked by a valid credential. • Outside lever is relocked after predetermined time as managed by the administrator. • Inside lever always retracts the latchbolt and allows unimpeded egress.
136		• Latchbolt operated by lever from either side • Key outside extends/retracts deadbolt • Thumbturn inside extends/retracts deadbolt • Inside lever simultaneously retracts latchbolt and deadbolt • Outside lever is momentarily unlocked by a valid credential • Outside lever is relocked after predetermined time as managed by the administrator • Inside lever always retracts the latchbolt and allows unimpeded egress.

How to

QTY	SERIES	FAMILY	CREDENTIAL	FUNCTION	LEVER	TRIM	FINISH	HANDING	BACKSET	STRIKE	CYLINDER	KEYWAY	KEYING
	MRS	SP	N	116	PJ	SJ	630	RH**	234	ASA	See Cylinders	See Keyways	KD
			N - NFC **NK** - NFC + Keypad **P** - Prox **PK** - Prox + Keypad	136	**J-TRIM** **PJ** - PHL **BJ** - BSN **MJ** - MIA **CJ** - CHI **DJ** - DAL **OJ** - ORL **LJ** - LA **TJ**-MEM*	**J-TRIM** **SJ** - Sectional Round Rose **SR** - Sectional Square Rose	**606** **612** **613** **622**	**RHR** **LH** **LHR**	**234** - 2-3/4"				**KD** - Keyed Different **KO** - Zero Bitted **KA** - Keyed Alike **KE** - Keyed to Existing **MK** - Master Key **CMK** - Construction Master Key

***MEM specify handing.**

****Handed but field reversible. Memphis handed only.**

6EWS-SP | Exit Device Trim

Wireless Locking Solution

BLUETOOTH ACCESS CONTROL

PHONE RFID KEY PIN

Features

- Built from PDQ's World-Class 6W Series Exit Device Trim
- For use with PDQ's 6300 Series RIM and Surface Vertical Rod
- 1-3/4"-2-1/4" door thickness
- RFID, Smartphone, API, Mechanical Key
- 125kHz Prox/ 13.56MHz Classic, EV1, EV2, EV3, NFC
- SDK, API
- Auto-Lock/Unlock, Scheduling, Logging, Battery Status
- Conventional, SFIC, LFIC, High Security and UL437
- Standalone, Online
- BLE 4.2, 5.2, ZigBee 3.0, Thread, WiFi (802.11 b/g/n)
- OSDP v2.2
- AES 256
- 4xAA batteries up to 2 years or 5V DC
- -20C to 65C Operating temperature
- 0-95% Humidity (Non - condensing)
- FCC Part 15
- Assembled in USA

Cylinders

Lever Designs

PHILADELPHIA — PHL BOSTON — BSN MIAMI - MIA ORLANDO - ORL CHICAGO - CHI

Architectural Finishes

613 (US10B) Oil Rubbed Bronze

622 (US19) Flat Black

626 (US26D) Satin Chromium

606 (US4) Satin Brass

How to Order

QTY	SERIES	FAMILY	CREDENTIAL	LEVER	TYPE	FINISH	HANDING	CYLINDER	KEYWAY	KEYING	OPTIONS
	6EWS	SP	N	PHL	R	613	RH*	See Cylinders	See Keyways	KD	
			N - NFC **NK** - NFC + Keypad **P** - Prox **PK** - Prox + Keypad	**BSN** **CHI** **MIA** **ORL**	**R** - Rim **V** - Surface Vertical Rod	**606** **622** **626**	**LH**			**KD** - Keyed Different **KO** - Zero Bitted **KA** - Keyed Alike **KE** - Keyed to Existing **MK** - Master Key **CMK** - Construction Master Key	**VD1** **VD2** **PR1** **YC1** **DK1**

***Handed but field reversible.**
***PDQ Finish designations do not indicate base material.**

CODE	DESCRIPTION
VD1	6EWS Trim and 6300R/V/CV Exit Device adapted to fit Von Duprin 98/99 door prep
VD2	6EWS Trim adapted to fit existing Von Duprin 98/99 device
PR1	6EWS Trim adapted to fit existing Precision 2100 device
YC1	6EWS Trim adapted to fit existing Yale 7000 or Corbin Russwin ED5000 device
DK1	6EWS Trim adapted to fit existing Dorma 9300 device

PDQ Manufacturing
Phone: 717.656.4281
Website: www.pdqlocks.com
Email: help@pdqlocks.com

pdqlocks.com

LT7003 3-2024

©PDQ Industries 2023