

# 6400R Series

# Commercial Narrow Stile Rim Exit Device

## Architectural Submittal Sheet



### Specifications

<b>Rail</b>	• Extruded aluminum • Specify 630F for full stainless surfaces (roll formed)
<b>Latch</b>	• Stainless steel dead locking with 3/4" throw
<b>Hand</b>	• Device is non-handed • Trim is non-handed or field reversible
<b>Dogging</b>	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices
<b>Minimum Stile Width</b>	• 6300 - 3-1/2" • 6400 - 2-1/8"
<b>Door Thickness</b>	• 1-3/4" - 2" (Consult factory for other)
<b>Door Width</b>	• 24", 36", 48" standard
<b>Door Height</b>	• Panic - Up to 10' • Fire - See fire ratings charts on page 3
<b>Strike Options</b>	• Default roller • Blade stop • Double door • Windstorm/Fire Mullion - Panic Mullion uses standard roller strike
<b>Finishes</b>	• 605 - Polished Brass, 606 - Satin Brass, 613 - Dark Bronze, 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Surfaces • Optional Anti Microbial Coating available on 626, 630 & 630F
<b>Fasteners</b>	• Includes machine and wood screws • SNB Optional
<b>Warranty</b>	• Ten (10) year limited warranty
<b>Electrified Options</b>	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors
<b>Certifications: Compliances: Listings:</b>	• Listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 3 hours. • Certified to ANSI/BHMA A156.3 Grade 1 • FL #40297 +60/-65 psf 4080 16ga Single • FL #40297 +50/-50 psf 4080 18ga Single • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States

# 6400R Series

## 6400R Rim Narrow Stile Exit Devices

PART	DESCRIPTION
6400R	Rim, Listed to UL305 for Panic, hex key dogging, 3'0" door
6400RF	Rim, Listed to UL10C for Fire, no dogging 3'0" door
6410R	Rim, Listed to UL305 for Panic, hex key dogging, 4'0" door
6410RF	Rim, Listed to UL10C for Fire, no dogging 4'0" door
6420R	Rim, Listed to UL305 for Panic, no dogging, 2'0" door
6420RF	Rim, Listed to UL10C for Fire, no dogging 2'0" door

## 6400R Rim Mechanical Options

PART	DESCRIPTION
EC	End Cap Cover
TLA	Head Cover (Similar to 6200 Series)
AM	Anti Microbial (630/626 only)
WS	Florida HVHZ
CD	Cylinder Dogging
LD	Less Dogging
SNB	Sex Nuts & Bolts
BS	Blade Stop Strike
DD	Double Door Strike
SHS	Tamper Proof Security Head Screws

## 6400R Rim Electrical Options


PART	DESCRIPTION
AL	Alarmed Exit
LM	Latch Bolt Monitoring
MLR	Motorized Latch Retraction
SS	Signal Switch - Request to Exit or touch bar Monitoring
ALHW	Alarmed Exit with Hard Wire Power and Relay
ISMC	Industry Standard Molex Connector (order in addition to other electrified options)

# 6400R Series

## 6400RF Rim Devices

		RATING	MAX OPENING	APPLICATION
	Single Door	3 Hour Rated	4' x 10' Door	
	Double Door with 9300F Mullion	3 Hour Rated	8' x 8' Pair	Single Egress Pairs (Swing Same Direction)

## 6400 Series Narrow Stile

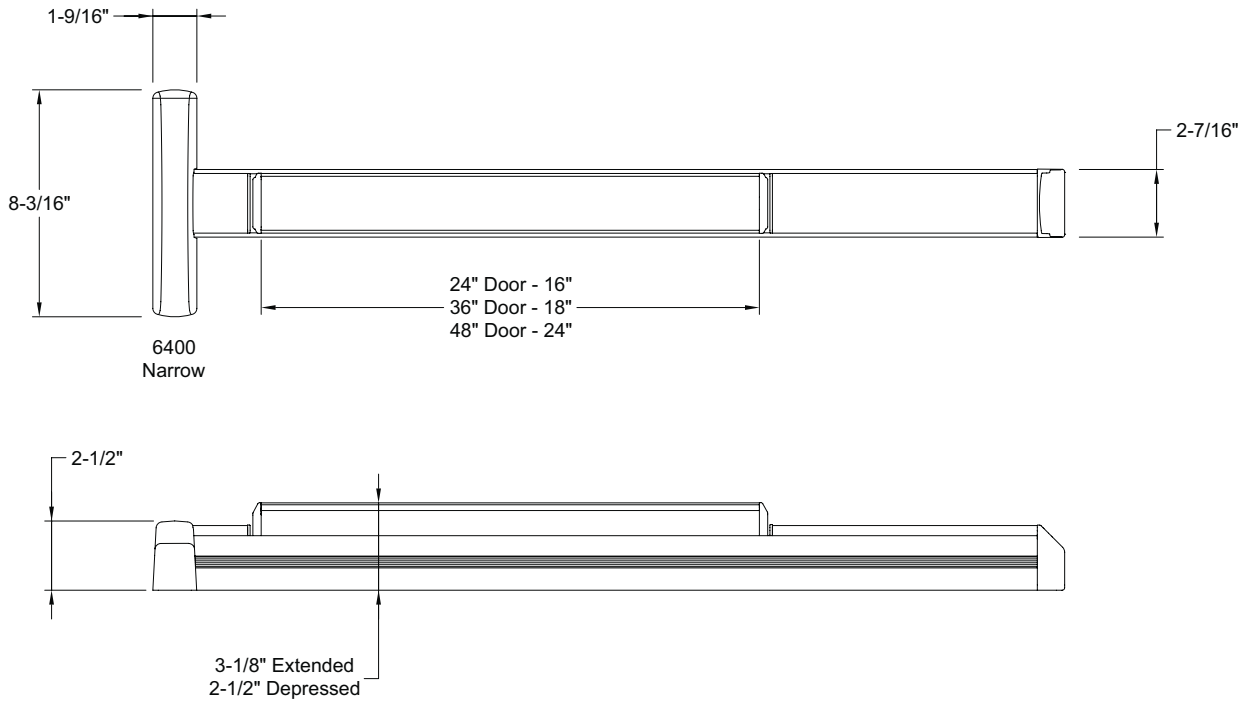

# 6400R Series

## Finishes

### 605

#### Bright Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler  
filler Polished brass plated cast head cover and end caps. Polished  
brass plated heavy gauge stamped push bar face.

### 606

#### Satin Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler  
Brushed brass plated cast head cover and end caps. Brushed brass  
plated heavy gauge stamped push bar face.

### 613

#### Dark Bronze

Dark bronze anodized aluminum rail, push bar sides and dogging filler  
Powder coated cast head cover and end caps. Powder coated heavy  
gauge stamped push bar face.

### 622

#### Flat Black

Black anodized aluminum rail, push bar sides and dogging filler  
Powder coated cast head cover and end caps. Powder coated heavy  
gauge stamped push bar face

### 625

#### Bright Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging  
filler Polished chrome plated cast head cover and end caps. Polished  
chrome plated heavy gauge stamped push bar face.

### 626

#### Satin Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging  
filler Brushed chrome plated cast head cover and end caps. Brushed  
chrome plated heavy gauge stamped push bar face.

### 630

#### Satin Stainless

Clear anodized aluminum rail (matte), push bar sides and dogging  
filler Plated (stainless look) cast head cover and end caps. Brushed  
stainless heavy gauge stamped push bar face.

### 630F

#### Full Satin Stainless

Brushed stainless fully clad rail, push bar and dogging filler Plated  
(stainless look) cast head cover and end caps.

