

6400R - PANIC NARROW RIM EXIT DEVICES WITH 9300 NON-LABELED MULLION AND 639027 PANIC STRIKE

TEMPLATE: 639327

REV. 1 12/27/22

6400 SERIES EXIT DEVICES USING SNB OR SURFACE MOUNT FASTENERS

DEVICE

MACHINE SCREWS:
USE #7 OR 13/64" DRILL AND 1/4-20 TAP

WOOD SCREWS:
USE 5/32" DRILL


SEX NUTS:
USE 3/8" DRILL PULL SIDE
USE 9/32" DRILL PUSH SIDE

STRIKE

MACHINE SCREWS:
USE #25 OR 5/32" DRILL AND #10-24 TAP

NOTES:

1. VERIFY PRINTED TO SCALE
2. SEX NUTS MAY BE REQUIRED FOR UNREINFORCED DOORS OR COMPOSITE FIRE DOORS. CONSULT DOOR MANUFACTURER'S RECOMMENDATIONS
3. SEE TRIM TEMPLATE (IF APPLICABLE) FOR RELATED MACHINING DETAILS
4. DIMENSION "X" MUST BE CUT REFER TO DEVICE INSTRUCTIONS FOR YOUR APPLICATION
5. CHECK PDQ WEBSITE FOR MOST RECENT REVISION WWW.PDQLOCKS.COM
6. MINIMUM STILE WIDTH: 3 1/2"

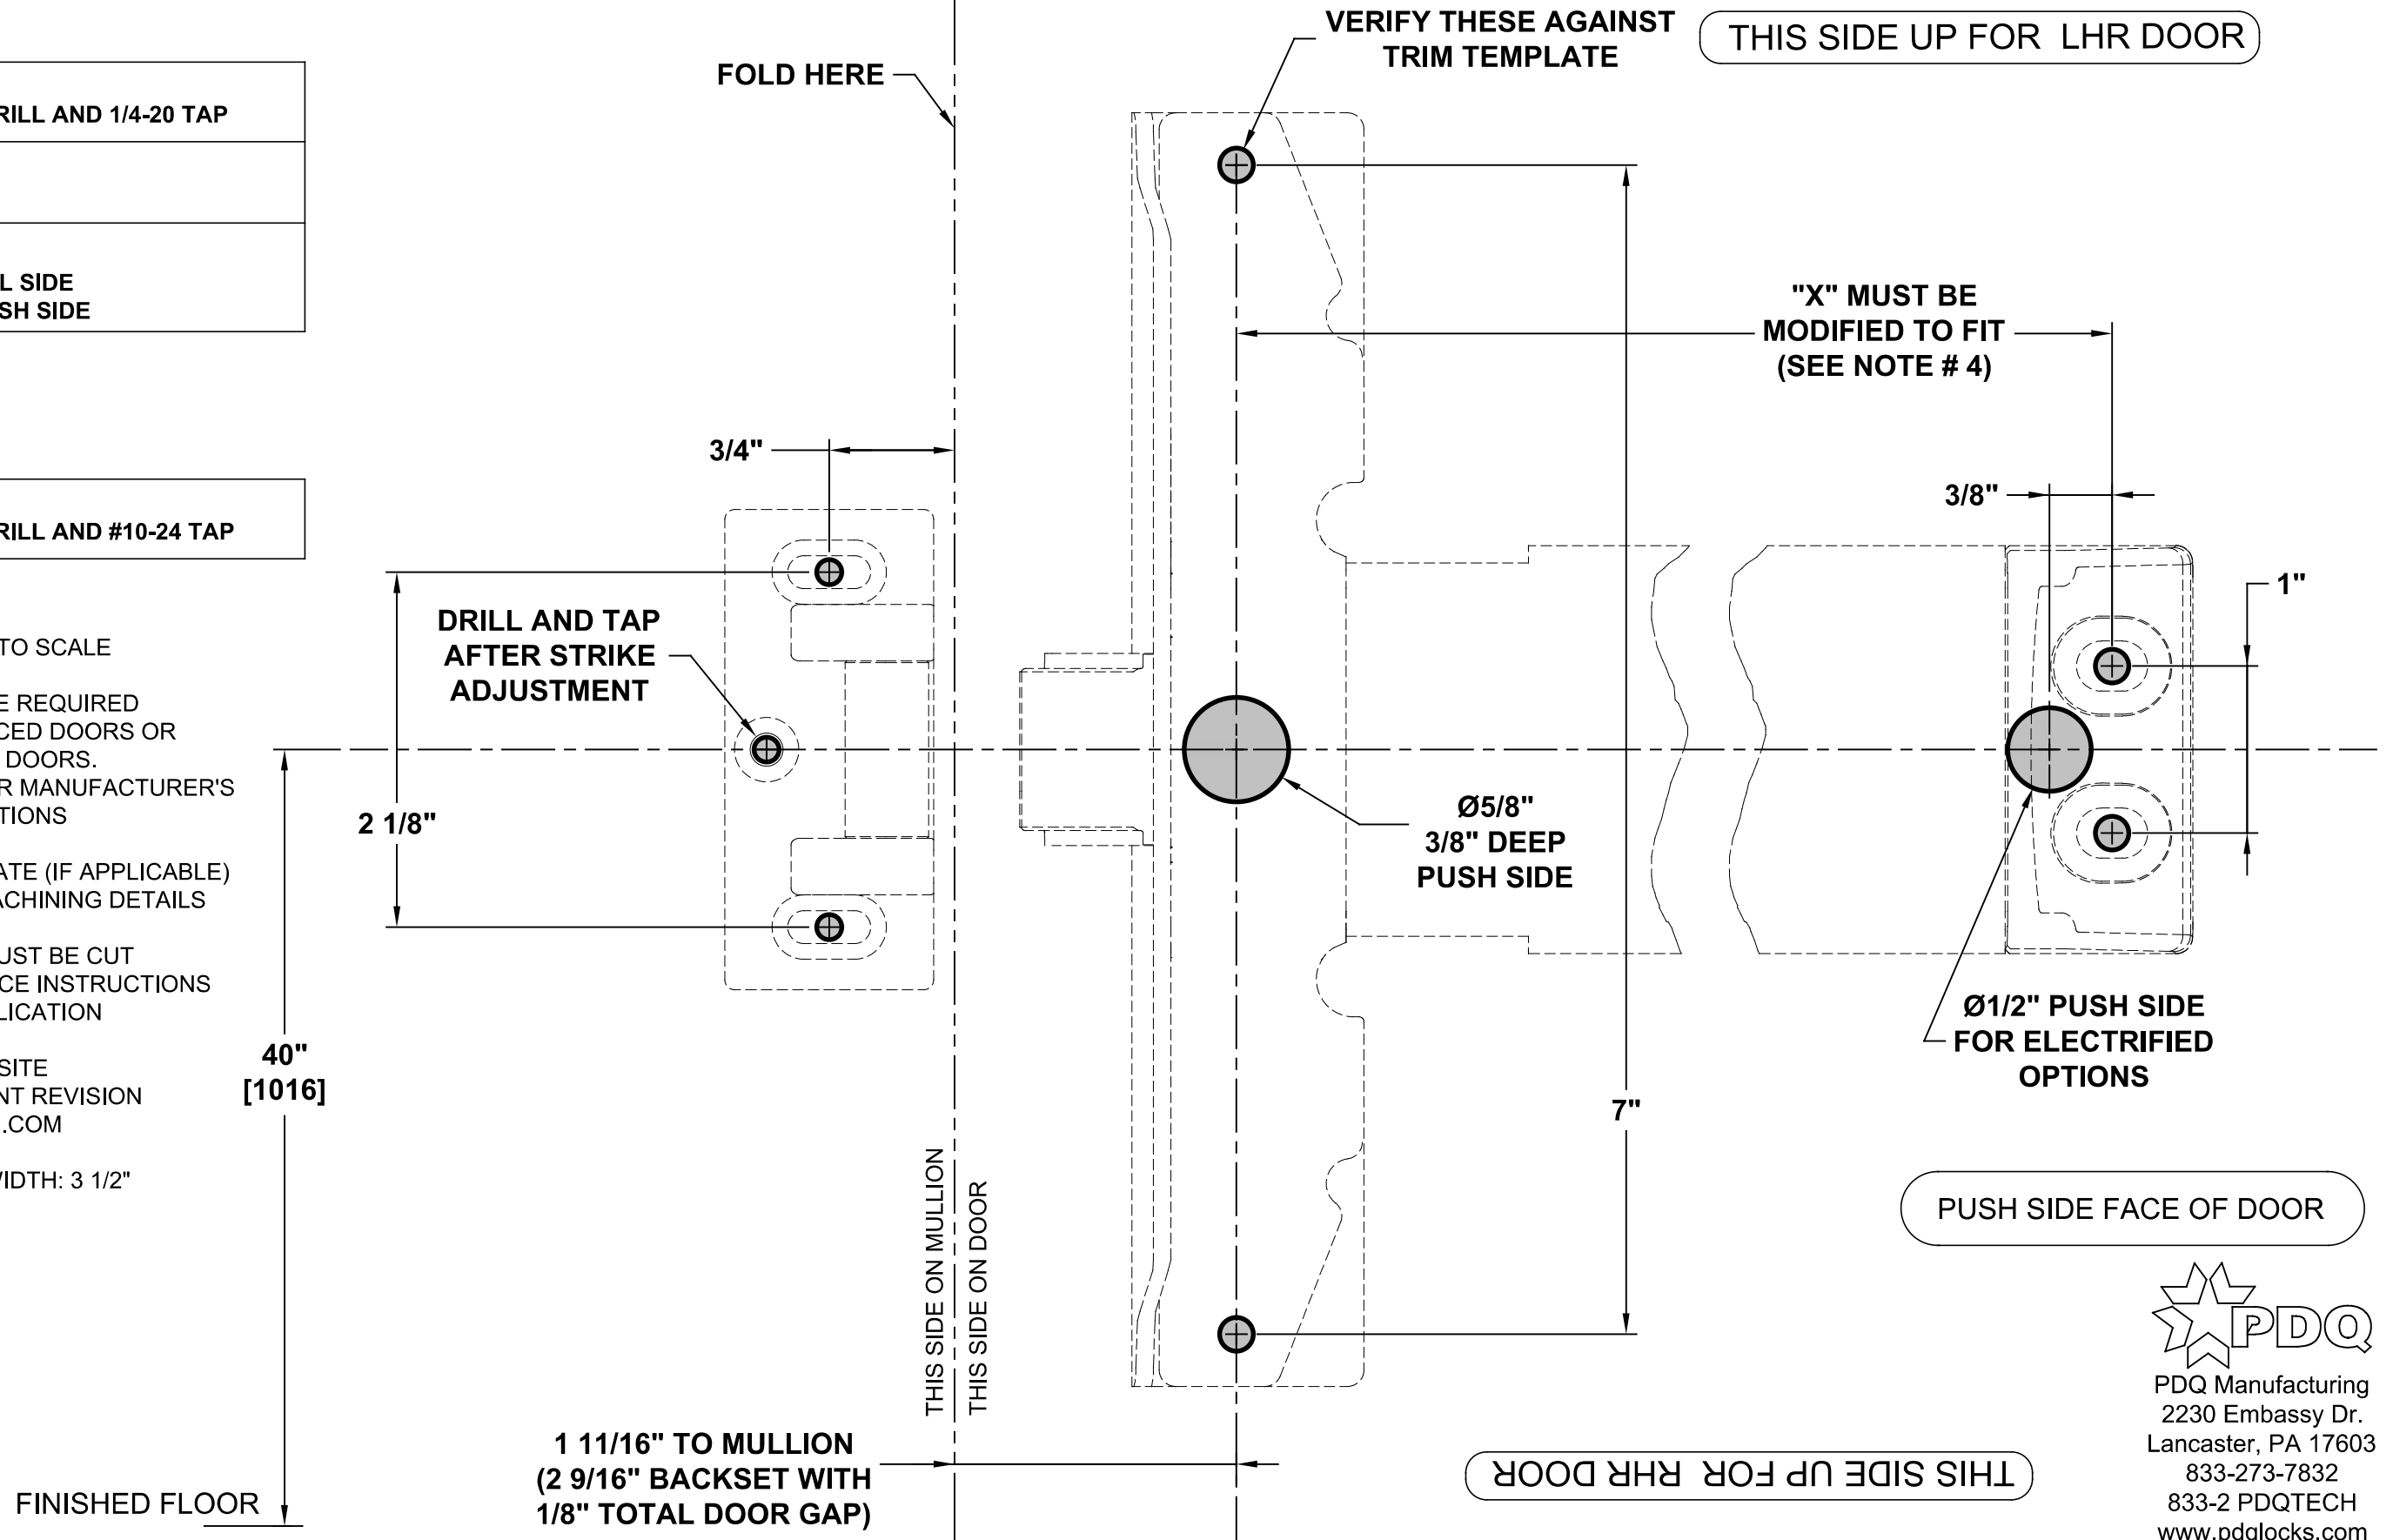

PDQ Manufacturing
2230 Embassy Dr.
Lancaster, PA 17603
833-273-7832
833-2 PDQTECH
www.pdqlocks.com