

# STS Series

Sliding Barn Door Hardware

# Sliding Barn Door Hardware

PDQ's stainless steel sliding track systems, also referred to as Barn Door Hardware, offer the ideal solution when modern styling and space saving is demanded. Perfect for hospitality, offices, multi-family or mixed used facilities.



**Standard** Complies with Hilton Hotel Design Guide for Hampton Inns.

## FEATURES:

- Door type: Wood, 1-3/4" thick.
- Max door weight: 220 lbs
- Grade 304 Stainless Steel components
- Nylon coated rollers
- Finish: 630 Satin Stainless Steel

## CONFIGURATIONS:

- Single
- Bi-parting

## INSTALLATION:

- Surface Mount

## STANDARD KIT INCLUDES:

- 1 ea Track (specify length)
- Wall Brackets: 4ea included with 78  
5ea included with 98
- 2 ea Track Stops
- 2 ea Top Mount Roller Hangers with Anti-jump pins
- 1 ea Floor Guide
- Installation fasteners

## How to Order


SERIES	DOOR MATERIAL	HANGER TYPE	TRACK (SPECIFY LENGTH)	FINISH	OPTIONS
<b>STS</b>  STS — SLIDING TRACK SYSTEM	<b>W</b>  W — WOOD	<b>171</b>  171 — TOP MOUNT, SINGLE ROLLER	<b>78</b>  78 — 78-3/4" FOR 36" WIDE DOOR 98 — 98-7/16" FOR 48" WIDE DOOR	<b>630</b>  630 — SATIN STAINLESS STEEL	<b>—</b>  SC — SOFT STOP

**Ordering Examples: Kit for Wood Door: STS W 171 78 630**

**Kit for Wood Door with Soft Stop: STS W 171 78 630 SC**

MODEL	DESCRIPTION
STS W 171 78 630	Sliding Door Hardware for 36" Wood Door,
STS W 171 98 630	Sliding Door Hardware for 48" Wood Door,

## Options

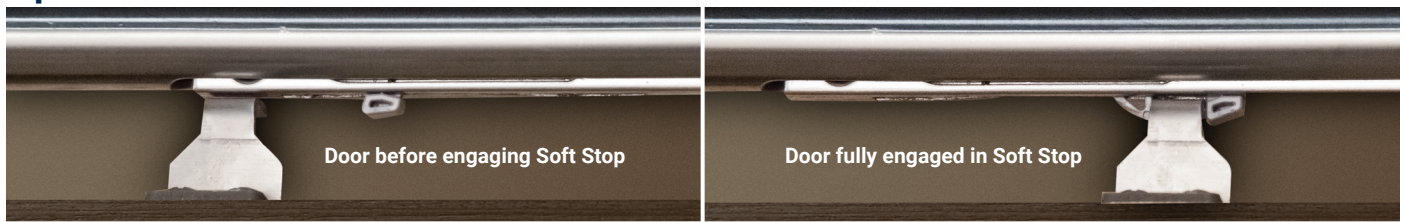

**Soft Stop** Upgrade to PDQ's innovative Soft Stop, designed to gently bring the door to the stopped position. When the door is set in motion then captured by Soft Stop, the dampened closing cycle minimizes the effect of impact loading to the wall brackets. The sleek design of the Soft Stop mechanism is integrated into the track and replaces the need for rigid stops. Soft Stop also maintains the door in the stopped position, preventing unwanted door creep.

### FEATURES:

- Door type: Wood, 1-3/4" thick.
- Max door weight: 220 lbs
- Grade 304 Stainless Steel components
- Nylon coated rollers
- Finish: 630 Satin Stainless Steel

### CONFIGURATIONS:

- Single
- Bi-parting


### INSTALLATION:

- Surface Mount

### STANDARD KIT INCLUDES:

- 1 ea STS SC Series Track (specify length)
- Wall Brackets: 4ea included with 78  
5ea included with 98
- 2 ea Top Mount Roller Hangers with Anti-jump pins
- 2 ea Soft Stop Trigger Bracket
- 1 ea Floor Guide
- Installation fasteners

## Bi-parting Solutions

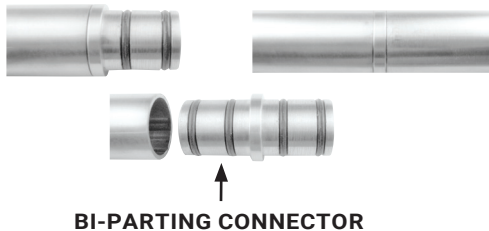

## Bi-parting Ordering Guide

OPENINGS UP TO 4 FT WIDE		OPENINGS OVER 4 FT WIDE	
QTY	DESCRIPTION	QTY	DESCRIPTION
1	STS Series Track Assy	2	STS Series Track Assy (Specify Size)
2	STSP17103-630 Roller Assemblies	2	STSP17103-630 Roller Assemblies
2	STSP7101-630 Stops	2	STSP7101-630 Stops
1	TSP17106-630 Floor Guide	1	TSP17106-630 Floor Guide
<b>Note: Refer to Installation Instructions</b>		1	STSP17106-630 Bi-Parting Connector

## Accessories

PART NUMBER		DESCRIPTION
STSP17101-630		STOP
STSP17103-630		TOP MOUNT ROLLER HANGER. INCLUDES INSTALLATION FASTENERS.
STSP17104-630		SOFT STOP ASSEMBLY
STSP17105-630		SOFT STOP TRIGGER BRACKET. INCLUDES INSTALLATION FASTENERS.
STSP17106-630		FLOOR GUIDE. INCLUDES INSTALLATION FASTENERS.
STSP17107-630		BI-PARTING CONNECTOR MATERIAL: GRADE 304 STAINLESS STEEL FINISH: 630 STAINLESS STEEL. MATCHES RAILFINISH. "O" RINGS MAKE FOR EASY INSERTION INTO TRACK AND HELPS DAMPEN UNWANTED VIBRATION NOISE.

## Cross Reference

PDQ	HAFELE	HAGER	PEMKO
STS SERIES	FLATEC II SERIES	9432 SERIES	W60 SERIES
STS WITH SOFT STOP	N/A	N/A	W60 WITH CUSHION STOP



## SECURING CONFIDENCE **OPENING** **POSSIBILITIES**

**Phone:** 717.656.4281

**Tech Support:** 800.441.9692

**Email:** [help@pdqlocks.com](mailto:help@pdqlocks.com)

**Headquarters:** 2230 Embassy Drive, Lancaster, PA 17603  
P.O. Box 6426, Lancaster, PA 17607

**Regional Distribution Centers:** Lancaster, PA | Norcross,  
GA | Auburn, WA

**Middle East Manufacturing:** Dammam, Kingdom of  
Saudi Arabia