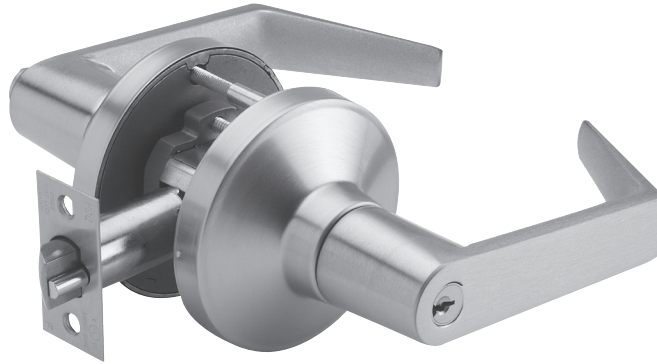


### Typical Applications

- Government Facilities
- Healthcare
- Higher Education
- Hospitality
- Houses of Worship
- Industrial
- K-12 Education
- Multi-family
- Offices
- Public Buildings



### Specifications













<b>FOR DOORS:</b>	• 1-3/8" to 1-3/4" thick • Preset for 1-3/4" door
<b>APPLICATION:</b>	• Through door thru-bolting • Fits 160 and 161 Door prep
<b>BACKSET:</b>	• 2-3/4" standard • 2-3/8", 5" optional
<b>CHASSIS:</b>	• Heavy duty diecast, investment cast, cold rolled steel, stainless steel mechanism
<b>FRONT:</b>	• 2-1/4" x 1-1/8" or 2-1/4" x 1" • Stainless Steel or Wrought Brass • Beveled 1/8" on 2"
<b>STRIKE:</b>	• ASA standard • Stainless Steel or Wrought Brass • T-Strike or Full Lip Strike optional
<b>LEVERS:</b>	• Philadelphia, Boston, Miami
<b>ROSE:</b>	• 3-3/8" DIA Wrought
<b>LATCHBOLT:</b>	• 1/2" Throw
<b>HAND:</b>	• Non-handed
<b>TRIM:</b>	• Solid diecast PHL, BSN or MIA Levers • 65° Lever Rotation • Wrought Brass Roses • Concealed Screws
<b>KEYS:</b>	• Two (2) per Lock
<b>KEYWAYS:</b>	• SCC standard (Schlage C Compatible) • Compatible with Best, Falcon and Arrow small format IC cores
<b>INTERCHANGEABLE CORE:</b>	• Available for all keyed functions • Large Format IC Core available for PHL Lever ONLY. For other lever shapes, contact PDQ Customer Service. • 6 or 7-pin • Compatible with Best, Falcon & Arrow
<b>CYLINDER:</b>	• 6-pin Brass Insert Cylinder keyed to 5-pins • Standard High Security and UL437 Cylinders Available
<b>KEYING:</b>	• Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) Can be keyed into existing master key systems
<b>FINISHES:</b>	• 605 (US3), 606 (US4), 612 (US10), 613 (US10B), 622 (US19), 625 (US26), 626 (US26D) • Optional Antimicrobial Coating Not available with 605 or 625 finish
<b>CERTIFICATIONS, LISTINGS, COMPLIANCES:</b>	• UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Certified to ANSI/BHMA 156.2, Grade 2 • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings
<b>WARRANTY:</b>	• Eight (8) Year Limited Warranty
<b>COUNTRY OF ORIGIN:</b>	• Assembled in the U.S.A. with U.S. and foreign material. • Meets requirements of the Buy American Act as a COTS product manufactured in the United States.

‡ Available with antimicrobial coating, technology that is known to inhibit the growth of microbes.

# GP Series

## PDQ Functions

FUNCTION	FUNCTION NUMBER	OUTSIDE   INSIDE	DESCRIPTION	ANSI NUMBER
<b>NON KEYED</b>				
Communicating	GP125		<ul style="list-style-type: none"> <li>Latchbolt operated by inside lever</li> <li>Blank plate outside</li> <li>Minimum clearance of 1-1/2" between doors</li> <li>Frame depth 7-1/8"</li> <li>Deadlocking (guarded) latchbolt</li> </ul>	—
Passage	GP126		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side at all times</li> </ul>	F75
Privacy Bedroom Bathroom	GP176		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or emergency release in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by emergency release from outside, rotating inside lever, or closing door</li> </ul>	F76
<b>KEYED</b>				
Storeroom	GP115		<ul style="list-style-type: none"> <li>Latchbolt operated by inside lever or key in outside lever</li> <li>Outside lever always fixed</li> </ul>	F86
Entrance	GP116		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push/turn button on inside</li> <li>When outside lever is locked by push button on inside – key from outside, or rotating inside lever unlocks outside lever</li> <li>When outside lever is locked by pushing and turning button on the inside, key from outside or rotating inside lever retracts latch but does not unlock outside lever</li> </ul>	F109
Classroom	GP148		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side</li> <li>Outside lever locked by key from outside</li> <li>Outside lever unlocked by key from outside</li> <li>Inside lever always operates latch</li> </ul>	F84
Exit or Twin Communicating	GP150		<ul style="list-style-type: none"> <li>Latchbolt operated by inside lever</li> <li>Blank plate outside</li> <li>Inside lever locked by key inside</li> <li>Inside lever unlocked by key inside</li> <li>Minimum clearance of 1-1/2" between doors</li> <li>Use only in rooms with more than one exit</li> <li>Frame depth 7-1/8"</li> </ul>	—
Entry	GP182		<ul style="list-style-type: none"> <li>Latchbolt operated by lever from either side or key in outside lever</li> <li>Outside lever locked by push button on inside</li> <li>Outside lever unlocked by key from outside, and rotating inside lever</li> </ul>	F82
<b>DUMMY</b>				
Double Dummy	GP205		<ul style="list-style-type: none"> <li>Pull lever both sides</li> <li>No mechanical operation</li> </ul>	—
Single Dummy	GP211		<ul style="list-style-type: none"> <li>Pull lever one side</li> <li>No mechanical operation</li> </ul>	—



INDICATES RIGID LEVER

# GP Series

## Levers



**Philadelphia**



**Boston**



**Miami**

## Finishes



605 (US3)  
Bright Brass



606 (US4)  
Satin Brass



612 (US10)  
Satin Bronze



613 (US10B)  
Oil Rubbed Bronze



619 (US15)  
Satin Nickel



622 (US19)  
Flat Black



625 (US26)  
Bright Chromium



626 (US26D)  
Satin Chromium

## Options

CODE	DESCRIPTION
<b>TC1IS</b>	Tactile Abrasive Coating - Inside only
<b>TC1OS</b>	Tactile Abrasive Coating - Outside only
<b>TC2</b>	Tactile Abrasive Coating - Both Sides
<b>SF</b>	Split Finishes
<b>LL</b>	Lead-Lined Rose
<b>DB</b>	Dust Box
<b>AM</b>	Antimicrobial Coating, Lever Set Includes Inside and Outside Lever and Rose

## Accessories

DESCRIPTION
Electric Strike for GP Locks (U.L. Listed)