



CL SERIES

Standard Duty

Interconnected Lock

Grade 2

Table of Contents

Product Specifications	3
Lever Designs	4
Finishes and Trim Designs	5
Functions, Cross Reference, Handing	6
How To Order	7
Keyways, Keying	7
Standard and High Security Cylinders/Cores	8
Dimensions	8
Strikes, Latchbolts, Deadbolts	9

Specifications



FOR DOORS:	• 1-3/8" and 1-3/4" thick.
PREPARATION:	• ANSI/BHMA A156.115 for 4" and 5-1/2" hole centers, field selectable.
DUST BOX:	• Included for Latchbolt and Deadbolt.
LATCHBOLT BACKSET:	• 2-3/8" or 2-3/4" (Default). Specify when ordering
DEADBOLT BACKSET:	• Field adjustable for 2-3/8" and 2-3/4" (Default).
STRIKE:	• "T"-Strike (Default) • ASA or Full-Lip optional
LEVERS:	• Boston, Miami, Memphis, Orlando, Philadelphia
ROSE:	• 2-3/8" Round Rose, 2-15/16" Square Rose
INSIDE ESCUTCHEON:	• 3-3/4"W x 9-3/4"H (Wrought)
LATCHBOLT:	• 1/2" Throw
DEADBOLT:	• ADA compliant.
HANDING:	• Non-handed (Except for Memphis Lever)
KEYS:	• Two (2) per Lock
KEYWAYS:	• SCC Default (Schlage C Compatible). For additional keyways, see Cylinders and Keying section.
INTERCHANGEABLE CORE:	• 6-pin or 7-pin • Compatible with Best SFIC. • Not available in high security.
CONVENTIONAL KEY IN KNOB/ LEVER CYLINDER:	• 6-pin Cylinder keyed to 5-pins
KEYING:	• Options: MK, CMK, or GMK, Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA) • Can be keyed into existing master key systems. See Keyways Section.
FINISHES:	• 605 (US3) Bright Brass, 613 (US10B) Oil Rubbed Bronze, 622 (US19) Flat Black, 626 (US26D) Satin Chrome (See Note)
CERTIFICATIONS, LISTINGS, COMPLIANCES:	• ANSI, Grade 2 • UL listed for 3 hrs, for single doors up to 4'0" x 8'0" • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • TAA compliant. Country of origin: KR
WARRANTY:	• Two (2) year Limited Warranty

NOTE: OTHER FINISHES AVAILABLE. CONTACT CUSTOMER SERVICE FOR QUOTE AND LEAD-TIME.



CL176 Privacy w/Indicator








Indicator Showing
Unoccupied



Indicator Showing
Occupied

Lever Designs

 ALL LEVERS

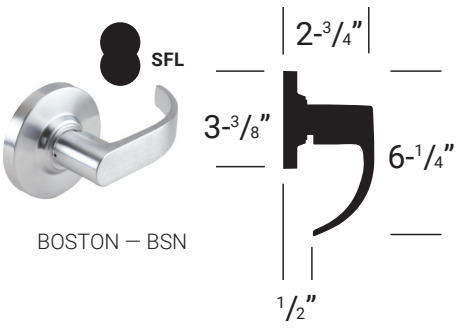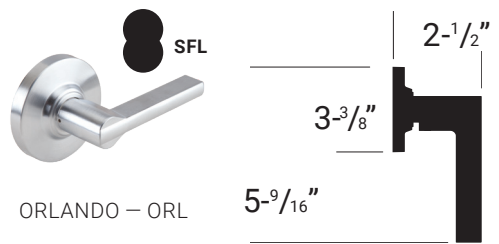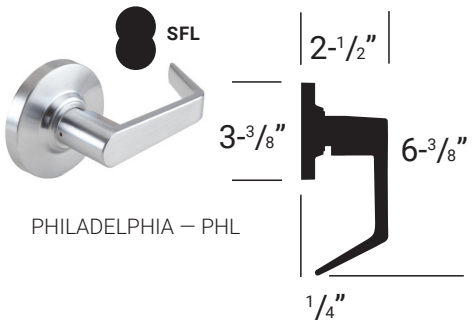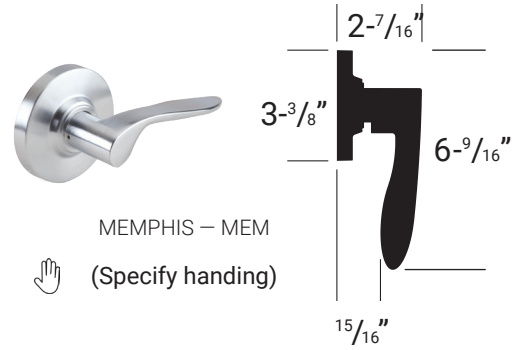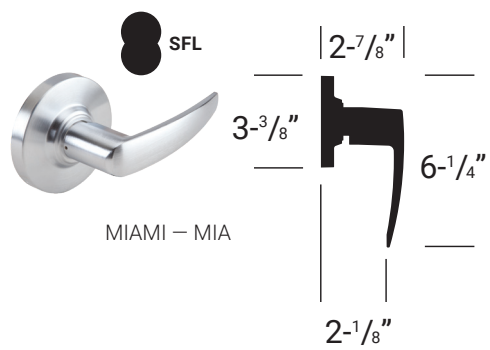


Trim Designs



ROUND ROSE



SQUARE ROSE

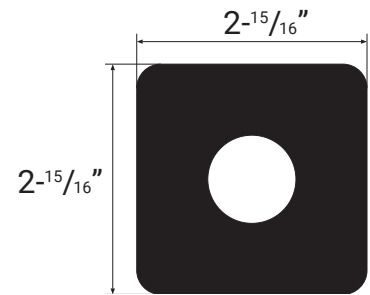

SQUARE ROSE DIMENSIONS

Finishes



605 (US3)
Bright Brass,
Clear Coated



613 (US10B)
Oil Rubbed Bronze,
Oxidized Satin Bronze,
Oil Rubbed, No Coating







622 (US19)
Flat Black



626 (US26D)
Satin Chromium
Plated, No Coating

PDQ Functions

FUNCTION	FUNCTION NUMBER	OUTSIDE INSIDE	DESCRIPTION	ANSI NUMBER
Entry Single Cylinder Passage Lever	126		• Outside and Inside lever always free • Deadbolt projected or retracted by key outside or turnpiece inside • When deadbolt is projected, turning inside knob/lever retracts deadbolt and latchbolt simultaneously	F95
Storeroom Double Cylinder (See note) Passage Lever	115		• Deadlocking latch bolt is operated by key outside or inside lever • Key outside projects or retracts dead bolt. • Operating inside lever or keys outside retracts dead bolt and deadlocking latch.	F98
Entry Double Cylinder (See note) Privacy Lever	116		• Outside lever locked by turn button in inside knob/lever • Inside lever always free • Unlocking of outside lever requires use of key or manual return of inside turn button • Deadbolt is activated by key in outside deadlock or turnpiece inside • Turning inside lever retracts deadbolt and latchbolt simultaneously	F97
Privacy with Dead Bolt Indicator No Cylinder Passage Lever	176		• Outside and Inside lever always free • Indicator outside • Thumbturn inside extends/retracts deadbolt • Emergency key outside retracts deadbolt • When deadbolt is projected, turning inside lever retracts deadbolt and latchbolt simultaneously	—

NOTE: Memphis lever not available in Small Format Interchangeable Core.


Cross Reference

ANSI NUMBER / FUNCTION	PDQ	CAL-ROYAL	DORMA	FALCON	HAGER	SCHLAGE®	STANLEY®	YALE
95 / ENTRY, SINGLE CYLINDER	CL 126	HIL00, JHIL00	J310	—	3710	CS/RS 210 SERIES	QCI230 SERIES	4851LN
97 / ENTRY, DOUBLE CYLINDER	CL 116	HIL30, JHIL30	J353	H101DG	3753	CS/RS 250 SERIES	QCI250 SERIES	4871LN
98 / STOREROOM, DOUBLE CYLINDER	CL 115	—	—	—	—	CS/RS 280 SERIES	QCI285 SERIES	—
PRIVACY W/INDICATOR, NO CYLINDER	CL 176	—	—	—	—	—	QCI285 SERIES	—


Information on this sheet is compiled from public documents and third parties. As a result, PDQ makes no guarantees as to their accuracy, content, quality or availability. Comparisons were made using the technical features only and are not commercial comparisons. Final suitability should be determined by a professional hardware consultant.

Handing

In Swing Door

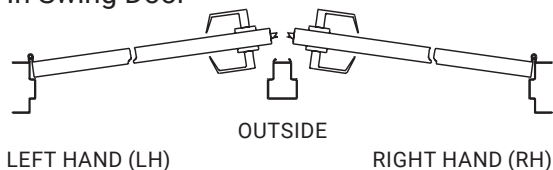

Out Swing Door

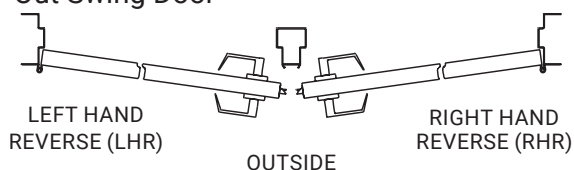

How To Order

QUANTITY	TYPE	FUNCTION	LEVER	ROSE	FINISH	BACKSET	HANDING	STRIKE	CYLINDER	KEYWAY	OPTION
6	CL	116	PHL	—	626	234	—	FL	D	SCC	—
Notes: 1- Other finishes available. Contact Customer Service. 2 - Specify handing when ordering Memphis lever. 3 - Memphis lever not available in SFIC.			MIA — Miami	BLANK — Round	605	238 —	LH —	ASA —	D Default		DB — Dust Box
			PHL — Philadel- phia	Rose (default)	613	2-3/8"	Left Hand	ASA	L Less Cylinder		
			BSN — Boston	All Levers	622	234 —	RH —	FL —	SF6 Lock is SFIC prepped w/ 6 pin core		
			MEM — Memphis	SR — Square Rose (	626	2-3/4"	Right Hand	T — "T" Strike (default)	SF7 Lock is SFIC prepped w/ 7 pin core		
			ORL — Orlando	Orlando Lever Only)				SFL Lock is SFIC prepped but less core			
									SFC Lock is SFIC prepped w/ construction core		
									SFP Lock is SFIC prepped w/ plastic construction core		

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (De- fault)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R
PDQ Restricted	TA		
Arrow AR1	AR1		
Corbin 59A1	CO59A1		
Corbin 60	CO6		
Corbin L4	CL4		
Russwin D1	RUD	PDQ Exclusive	PDQ1
Russwin 981	RUD981		PDQ2
Schlage E	SCE	PDQ Exclusive and Re- stricted	PDQ3
Schlage C	SCC		
Schlage C-K	SCC-K		
Sargent LA	SAL		
Sargent RA-RC	RA-RC		
Yale E1R	YA8		
Yale GA	GA		
Falcon E-R	FAL		
Kwikset	KW		


CYLINDER OPTIONS	ICON
D	
SFL	

Keying

DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"O" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

Cylinders/Cores

PDQ cylinders and cores are designed to interface with the keyways of most major lock manufacturers. Insert cylinders are designed to accept 6 pins and are combined for 5 pins. These cylinders are shipped with two keys. Interchangeable core cylinders are available combined or uncombined for 6 and 7 pins and must be specified when ordering. Available in two finishes – 606 (US4) and 626 (US26D); specify when ordering separately.



Key in Knob/Lever Cylinder (Default)



Small Format Interchangeable Core.

Cylinders & Cores

DESCRIPTION	PINS	FINISHES	
		606	626
 Conventional Key In Knob/Lever Cylinder (Default)	6 Pin	V4802-8	V4802-7
 Small Format, Best® Compatible - Uncombined	6 Pin	I5206 -8	I5206 -7
	7 Pin	I5207-8	I5207-7
 Small Format, Best® Compatible - Combined	6 Pin	I5206-1-8	I5206-1 -7
	7 Pin	I5207-1-8	I5207-1 -7


NOTE: Part Numbers Listed For Default Keyway. For Other Keyways, See Keyways Section.

High Security Cylinders & Cores


DESCRIPTION	PINS	FINISHES	
		606	626
 Key in Knob/Lever Cylinder	6 Pin	HSC125-8	HSC125-7
 Key in Knob/Lever Cylinder - UL437	6 Pin	HSC425-8	HSC425-7
 Small Format, Best® Compatible - Combined	6 Pin	HSC806-8	HSC806-7
	7 Pin	HSC807-8	HSC807-7

NOTE: Part Numbers Listed For Default Keyway. For Other Keyways, See Keyways Section.

Dimensions

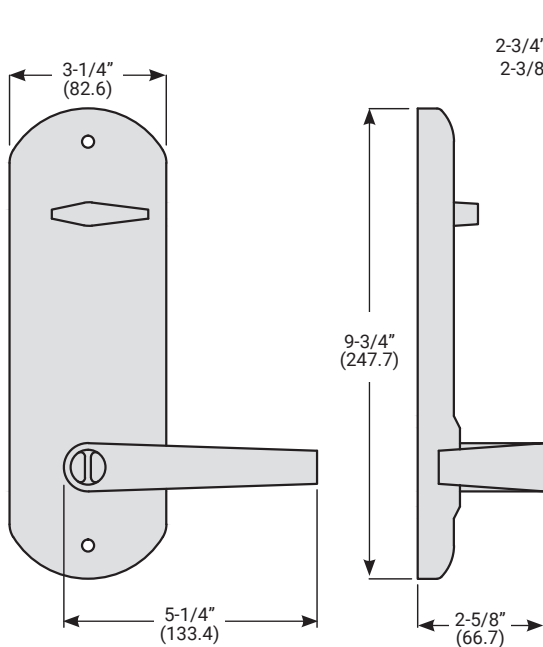


Note: Dimensions in parenthesis in millimeters

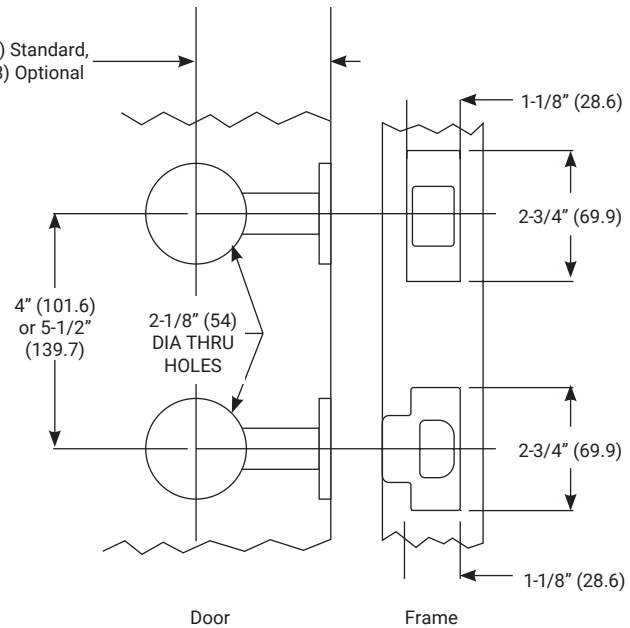


Note: Fits ANSI/BHMA 156.115 door preparation for Interconnected Locks

Strikes


All PDQ series strikes are reversible and shipped with screws. Specify finish when ordering.




ASA ANSI Strike



"T" Strike Square
Corners (Default)



FL Full Lip Strike



Deadbolt Strike Square Corners


NOTE: Dimensions in parenthesis in millimeters

Strikes

	CODE	DESCRIPTION	605	613	622	630
	ASA	ASA Strike (any finish) 1-1/4" x 4-7/8"	V91900-5	V91900-6	V91900-H	V91900-7
	T	T-Strike (any finish) 1-1/8" x 2-3/4"	V91901-5	V91901-6	V91901-H	V91901-7
	FL	Full Lip Strike (any finish) 1-5/8" x 2-1/4"	V919010-5	V919010-6	V919010-H	V919010-7
	W	Deadbolt Strike	I4072-5	I4072-6	I4072-H	I4072-7

Latchbolts

BACKSET	TYPE	FACEPLATE	CORNERS	PDQ NUMBER
2-3/8"	SPRINGLATCH	2-1/4" X 1	SQUARE (DEFAULT)	V21900-722
		2-1/4" X 1-1/8"	SQUARE	V21900-724
		2-1/4" X 1	1/4" RADIUS	V21900-722R
	DEADLATCH	2-1/4" X 1	SQUARE (DEFAULT)	V21900-721
		2-1/4" X 1-1/8"	SQUARE	V21900-723
		2-1/4" X 1	1/4" RADIUS	V21900-721R
2-3/4"	ADJUSTABLE	2-1/4" X 1	SQUARE (DEFAULT)	I04507
		2-1/4" X 1	1/4" RADIUS	I04507R
	SPRINGLATCH	2-1/4" X 1	SQUARE	V21900-714
		2-1/4" X 1-1/8"	SQUARE (DEFAULT)	V21900-712
		2-1/4" X 1	SQUARE	V21900-711
	DEADLATCH	2-1/4" X 1-1/8"	SQUARE (DEFAULT)	V21900-713



Dead Latch



Springlatch

Deadbolts

BACKSET	TYPE	FACEPLATE	CORNERS	PDQ NUMBER
2-3/8" AND 2-3/4"	ADJUSTABLE	2-1/4" X 1	SQUARE (DEFAULT)	I04507
		2-1/4" X 1	1/4" RADIUS	I04507R
2-3/4" (DEFAULT)	FIXED	2-1/4" X 1-1/8"	SQUARE	I04510



Deadbolt



SECURING CONFIDENCE **OPENING** **POSSIBILITIES**

Phone: 717.656.4281

Tech Support: 800.441.9692

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA 17603
P.O. Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of
Saudi Arabia