
ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53500

REV. 6 11-21-22

MORTISE FUNCTIONS

MR113 MR115 MR116 MR139 MR148 MR199 MR215

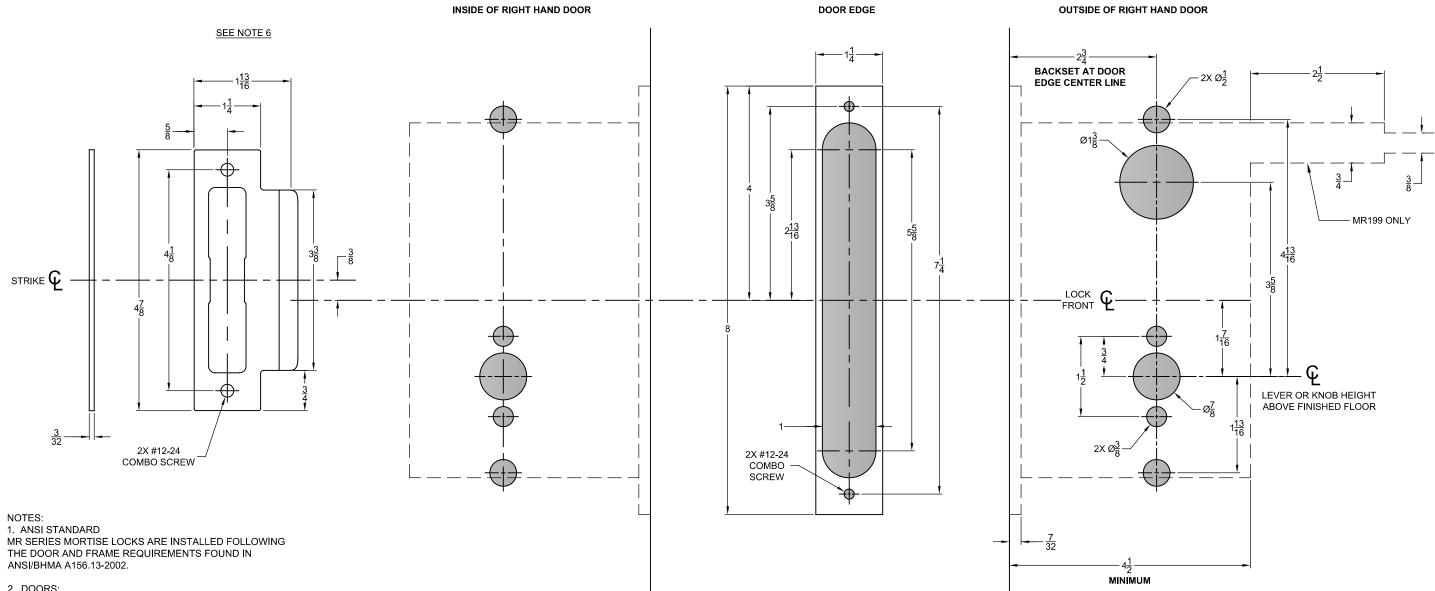

REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

3. DOOR THICKNESS:

STANDARD DOOR THICKNESS IS 1- $\frac{3}{4}$ ". CONSULT FACTORY FOR OTHER DOOR SIZES.

4. LEAD LINING:

ADD $\slash_8^{\prime\prime}$ TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

5. SILENCERS AND WEATHER STRIPPING: PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

6. DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.

PDQ Manufacturing 2230 Embassy Dr. Lancaster, PA 17603 833-273-7832 833-2 PDQTECH www.pdqlocks.com