


ESCUTCHEON LEVER AND BALL KNOB TRIM

TEMPLATE: W53505

REV. 4 04-18-2019


MORTISE FUNCTIONS MR205

INSIDE OF RIGHT HAND DOOR



DOOR EDGE

OUTSIDE OF RIGHT HAND DOOR

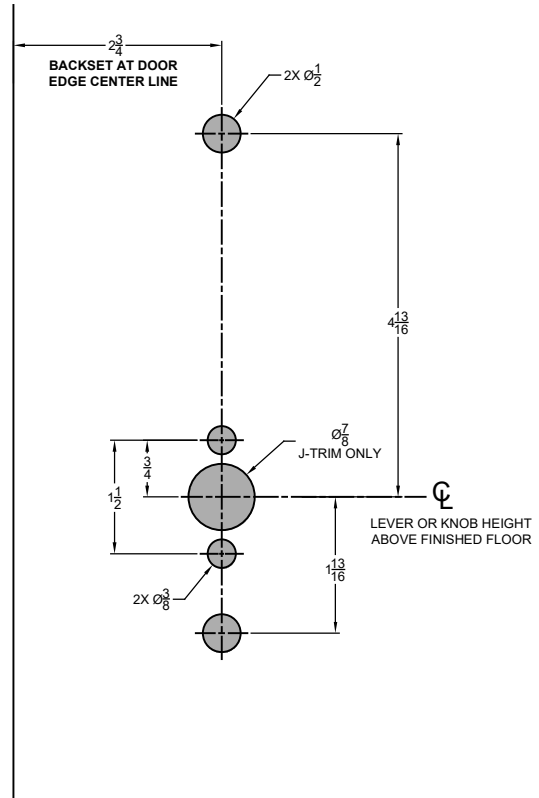

ANSI STANDARD:
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE
DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA
A156.13-2002.

DOORS:
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

DOOR THICKNESS:
STANDARD DOOR THICKNESS IS 1-3/4". CONSULT FACTORY FOR
OTHER DOOR SIZES.

LEAD LINING:
ADD 3/8" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD
LINED MR SERIES MORTISE LOCK BODY.

SILENCERS AND WEATHER STRIPPING:
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE
WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND
PROOFING.