


SECTIONAL LEVER AND BALL KNOB TRIM

TEMPLATE: W53513
REV. 5 04-25-2019

MORTISE FUNCTIONS
MR114 MR128 MR137
MR138 MR157 MR158
MR159 MR200

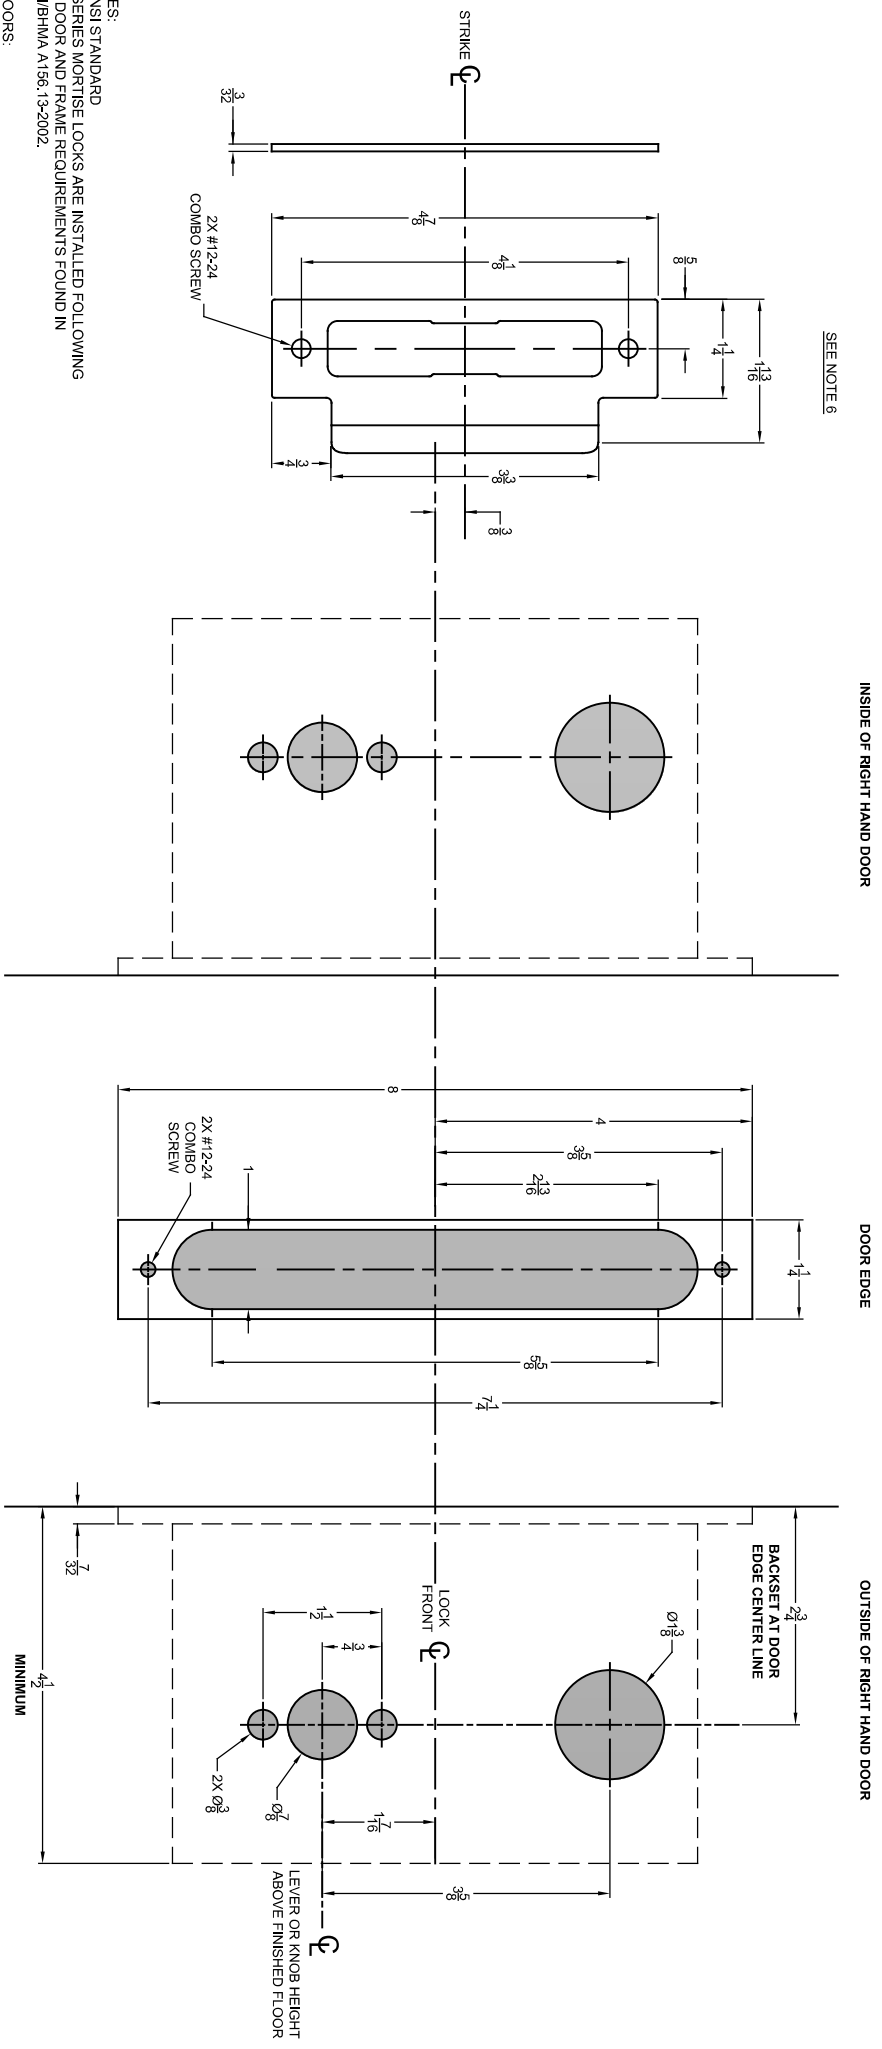

SEE NOTE 6

NOTES:
1. ANSI STANDARD MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSIBHMA A156.13-2002.

2. DOORS: REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

3. DOOR THICKNESS: STANDARD DOOR THICKNESS IS 1-3/4". CONSULT FACTORY FOR OTHER DOOR SIZES.

4. LEAD LINING: ADD 1/2" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

5. SILENCERS AND WEATHER STRIPPING: PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

6. DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRIC STRIKE. SEE ELECTRIC STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.