

# SECTIONAL LEVER AND BALL KNOB TRIM

TEMPLATE: W53515



REV. 6 04-29-2019

MORTISE FUNCTIONS MR205 MR211 TJ205  
TJ211

INSIDE OF RIGHT HAND DOOR

DOOR EDGE

OUTSIDE OF RIGHT HAND DOOR

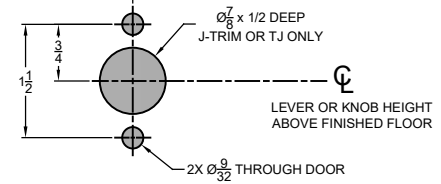

**ANSI STANDARD:**  
MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

**DOORS:**  
REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

**DOOR THICKNESS:**  
STANDARD DOOR THICKNESS IS  $1\frac{3}{4}$ ". CONSULT FACTORY FOR OTHER DOOR SIZES.

**LEAD LINING:**  
ADD  $\frac{1}{8}$ " TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

**SILENCERS AND WEATHER STRIPPING:**  
PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.