


SECTIONAL LEVER AND BALL KNOB TRIM

TEMPLATE: W53523
REV. 3 12-15-2022

MORTISE FUNCTIONS MR 236 MR241
MR260 MR269

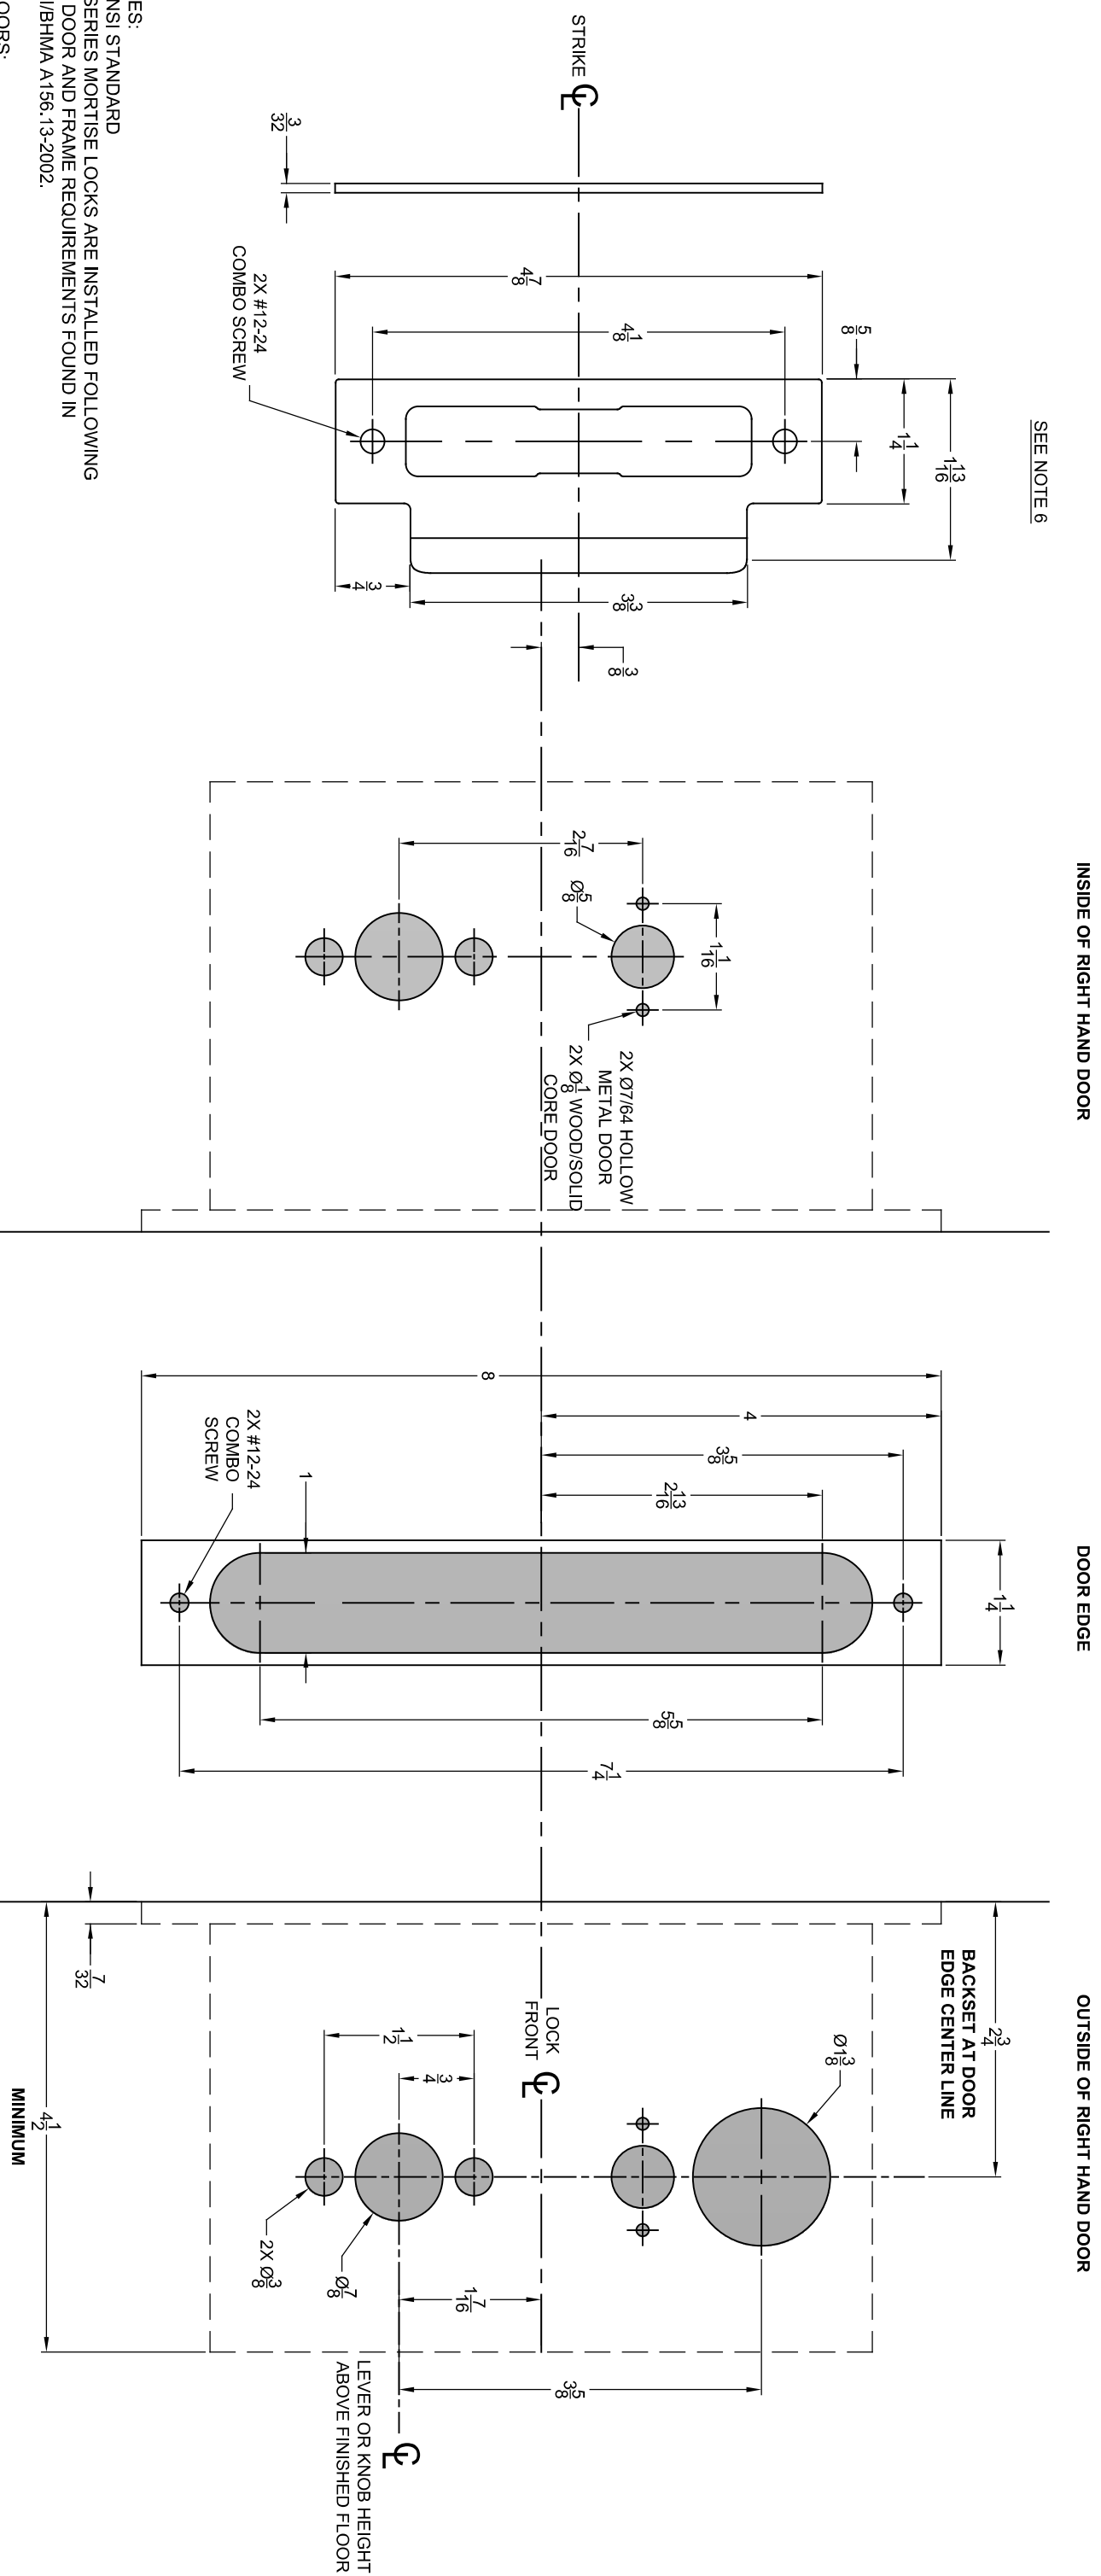

NOTES:
1. ANSI STANDARD MR SERIES MORTISE LOCKS ARE INSTALLED FOLLOWING THE DOOR AND FRAME REQUIREMENTS FOUND IN ANSI/BHMA A156.13-2002.

2. DOORS: REINFORCEMENT IS REQUIRED PER ANSI A115.1-1991.

3. DOOR THICKNESS: STANDARD DOOR THICKNESS IS 1 3/4". CONSULT FACTORY FOR OTHER DOOR SIZES.

4. LEAD LINING: ADD 1/8" TO MORTISE WIDTH WHEN PREPARING DOOR FOR A LEAD LINED MR SERIES MORTISE LOCK BODY.

5. SILENCERS AND WEATHER STRIPPING: PROVISIONS MUST BE MADE TO ALLOW PROPER DOOR CLOSURE WHEN USING DOOR SILENCERS, WEATHER STRIPPING OR SOUND PROOFING.

6. DIMENSIONS FOR STRIKE ARE NOT APPLICABLE FOR THE ELECTRICAL STRIKE. SEE ELECTRICAL STRIKE MANUFACTURERS TEMPLATE FOR DETAILS.