
# 5300/5500 DOOR CLOSER MODELS **TOP JAMB INSTALLATION - PUSH SIDE - PIVOT STOP (PS) ARM APPLICATIONS**

Opening	Dim. A	Dim. B
85°	10-3/8" [263.5]	15-7/8" [403.2]
90°	9-3/4" [247.7]	15-1/4" [387.4]
95°	9-3/16" [233.4]	14-11/16" [373.1]
100°	8-11/16" [220.7]	14-3/16" [360.4]
105°	8-5/16" [211.1]	13-13/16" [350.8]
110°	7-15/16" [201.6]	13-7/16" [341.3]

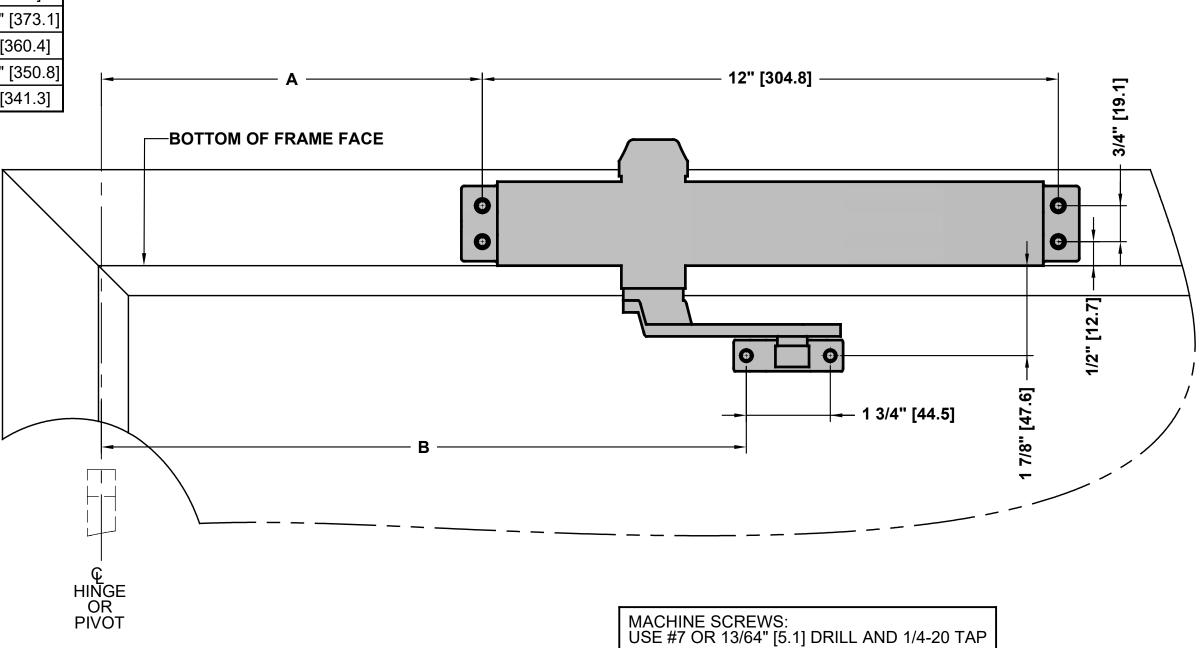

## NOTES:

- 1. DO NOT SCALE DRAWING. LEFT HAND DOOR SHOWN.
- 2. DIMENSIONS ARE GIVEN IN INCHES [MM].
- 3. FOR DOORS WITH REVEAL OF 4 INCHES. CONSULT FACTORY FOR OTHER REVEAL DEPTHS.
- 4. MINIMUM CEILING CLEARANCE FROM BOTTOM OF FRAME FACE FOR CLOSER : 2-11/16".
- 5. SEX NUTS REQUIRED FOR UNREINFORCED OR COMPOSITE FIRE DOORS.
- 6. DOOR AND FRAME MUST BE REINFORCED PER ANSI/SDI A250.8 REQUIREMENTS MINIMUM THICKNESS RECOMMENDED FOR REINFORCEMENTS IN HOLLOW-METAL DOORS AND FRAMES: 0.067" UNLESS OTHERWISE NOTED.
- 7. HOLLOW-METAL DOORS REQUIRE CHANNEL OR BOX-TYPE REINFORCEMENT WHEN SEX NUT MOUNT IS SPECIFIED.

- WOOD DOOR/FRAME SCREWS: USE 5/32" [4] DRILL
- SEX NUTS: USE 3/8" [9.5] DRILL (CLOSER TO DOOR)



PDQ Manufacturing 2230 Embassy Dr. Lancaster, PA 17603 833-273-7832 833-2 PDQTECH www.pdqlocks.com

# 5300/5500 DOOR CLOSER MODELS **TOP JAMB INSTALLATION - PUSH SIDE - PIVOT STOP (PS) ARM APPLICATIONS**




- 1. Confirm this sheet is correct for your product and application.
- 2. Read the complete instruction sheet before starting installation.
- 3. Incorrectly installed or adjusted door closers can cause personal injury or property damage.
- 4. To ensure safe operation, door closers should be examined and serviced regularly.

### NOTES:

- See reverse side of this sheet to machine door & frame. 1.
- 2. Dimensions based on 4-1/2" x 4-1/2" full mortise butt hinges with 5/8" stop and 1/8" door gap.
- 3. Confirm door & frame are properly reinforced.
- 4. Sex nuts required for un-reinforced or composite fire doors.
- 5. Do not install closer on the exterior (weather) side of building.

## **TOOLS REQUIRED:**

- Power drill
- 2. 10mm box/combo wrench
- 3. Phillips screw driver
- 4. #7 or 13/64" drill bit and 1/4-20 tap (metal screws)
- 5. Tap handle
- 6. 5/32" drill bit (wood screws)
- 7. 3/8" drill bit (sex nuts)
- 8. Center punch







- Determine proper opening angle.
- 2. Determine door hand (LH or RH).
- 3. Using template (see reverse side), mark holes on door & frame.

#### **INSTALL CLOSER AND ARM:** 1. Attach closer body to frame face. Sweep and latch valves point toward hinge.

2. Attach foot to door.




- 3. Secure main arm to closer spindle 90° to door/frame.
- 4. Connect adjustment arm with foot assembly: Rotate main arm until adjustment arm is 90° to door & frame. Tighten arm screw or bolt.

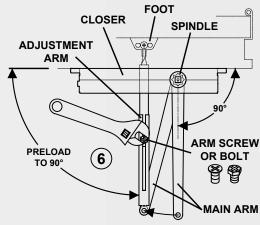

### **ADJUST SPRING POWER:**


(26) 1. Use 4 mm hex key provided to adjust to size on chart. Clockwise (CW) turns increase spring power (+). Counter-clockwise (CCW) turns decrease spring power (-).

5300/5500 Series closers can be adjusted to meet ADA Barrier Free (BF) applications. Compliance with ADA/BF requirements may result with door not fully closing and latching. Check with local AHJ. Closer size may vary due to site conditions.

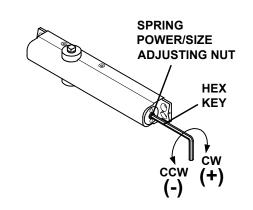


	DOOR WIDTH		APPROX.
SIZE	INTERIOR	EXTERIOR	360° TURNS
BF	5 LBF ON 36"		-8 (CCW)
1	32" [812.8]	28" [711.2]	-6 (CCW)
2	36" [914.4]	32" [812.8]	-4 (CCW)
3	42" [1066.8]	36" [914.4]	0 (PRESET)
4	48" [1219.2]	42" [1066.8]	+5 (CW)
5	54" [1371.6]	48" [1219.2]	+9 (CW)
6	58" [1473.2]	54" [1371.6]	+12 (CW)

door.




#### **INSTRUCTION: 539356** REV.0 10-01-19

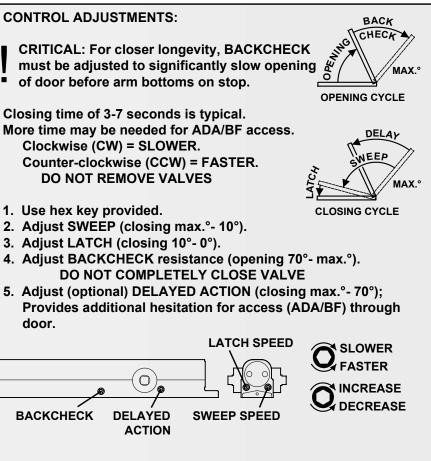

**INSTALL COVER:** 

1. Slip cover over closer until flush with door face. 2. Wide Cover - Orient cover so cutout is at bottom of closer body. Secure to closer with screw on each end. Narrow Cover - Cover will snap into slots on closer body. Install dust cap over top closer pinion.

NOTE: Sweep, latch, backcheck, and optional delayed action valves are all accessible after cover installation.



PDQ Manufacturing 2230 Embassy Dr. Lancaster, PA 17603 833-273-7832 833-2 PDQTECH www.pdqlocks.com