
7101 DOOR CLOSER INSTRUCTION SHEET PARALLEL ARM INSTALLATION - PUSH SIDE - NON-HOLD OPEN AND HOLD OPEN APPLICATIONS

INSTRUCTION: 719353 REV. 3 09-06-19 **UNDERSIDE OF** SOFFIT / STOP **PUSH SIDE FACE OF DOOR** PDQ Manufacturing



7101 DOOR CLOSER INSTRUCTION SHEET

PARALLEL ARM INSTALLATION - PUSH SIDE - NON-HOLD OPEN AND HOLD OPEN APPLICATIONS

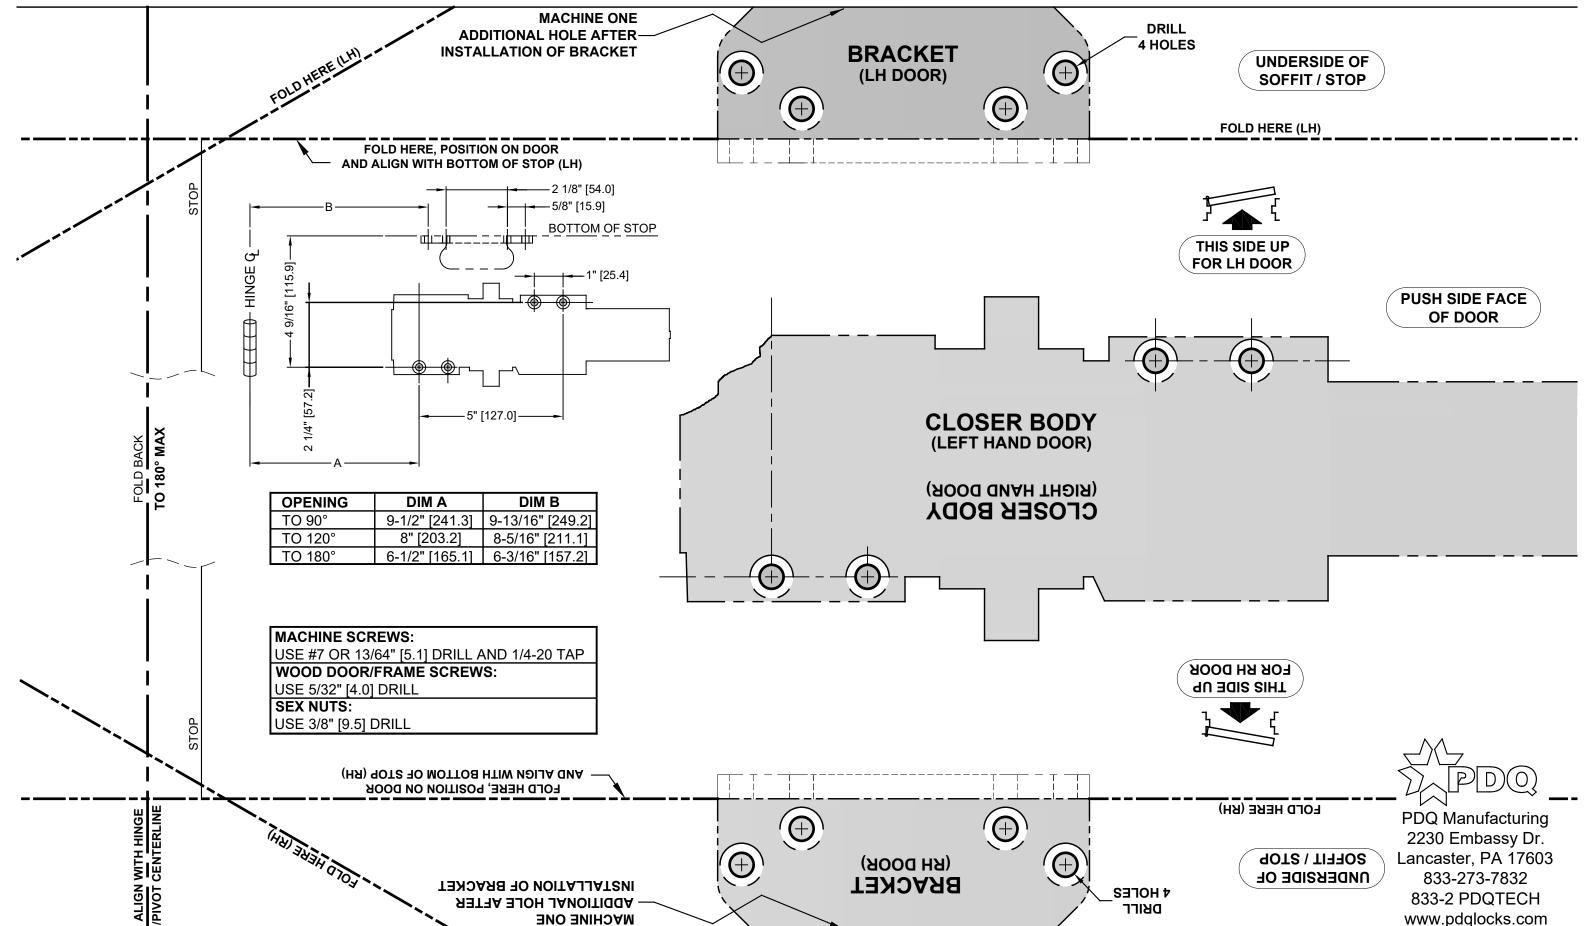

- Confirm this sheet is correct for your product and application.
- 2. Read the complete instruction sheet before starting installation.
- 3. Incorrectly installed or adjusted door closers can cause personal injury or property damage.
- 4. To ensure safe operation, closers should be examined and serviced regularly.




- See reverse side of this sheet to machine door & frame.
- Dimensions based on 4-1/2" x 4-1/2" full mortise butt hinges with 5/8" stop and 1/8" door gap.
- 3. Confirm door & frame are properly reinforced.
- 4. Sex nuts required for un-reinforced or composite fire doors.
- 5. Do not install closer on the exterior (weather) side of building.



TOOLS REQUIRED:


- Power drill
- 10mm box/combo wrench
- 3. Phillips screw driver
- 4. #7 or 13/64" drill bit and 1/4-20 tap (machine screws)
- 5. Tap handle
- 6. 5/32" drill bit (wood screws)
- 7. 3/8" drill bit (sex nuts)
- 8. Center punch





PREPARE DOOR AND FRAME:


- **Determine maximum opening** angle.
- 2. Determine door hand.

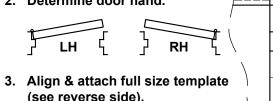

- (see reverse side). 4. Mark door & frame with center
- punch.
- 5. Remove template before machining door & frame.




- **BACKCHECK POSITIONING:** Completely close backcheck positioning valve.
- 4. Valve must be closed before installing closer.




INSTALL CLOSER AND ARM:


- Attach closer body to door. Tube points away from hinges.
- 2. Attach PA bracket to bottom of frame soffit.



FOOT ASSEMBLY



PA BRACKET



CLOSER BODY


PA BRACKE


- 4. Install main arm parallel to door face, pointing away from hinge or pivot.
- 5. Secure main arm to closer spindle.


SPACER

BLOCK

6. Attach foot assembly onto PA bracket.










ADJUST SPRING POWER:

Use 4 mm hex key provided to adjust to size on chart. Clockwise (CW) turns increase spring power (+). Counter-clockwise (CCW) turns decrease spring power (-).

7100 Series closers can be adjusted to meet

ADA Barrier Free (BF) applications. Compliance with ADA/BF requirements may result with door not fully closing and latching. Check with local AHJ. Closer size may vary due to site conditions.



KEY

	DOOR WIDTH		
SIZE	INTERIOR	EXTERIOR	360° TURNS
BF	5 LBF ON 36"		-15 (CCW)
1	32" [812.8]	28" [711.2]	-12 (CCW)
2	36" [914.4]	32" [812.8]	-7 (CCW)
3	42" [1066.8]	36" [914.4]	0 (PRESET)
4	48" [1219.2]	42" [1066.8]	+4 (CW)
5	54" [1371.6]	48" [1219.2]	+6 (CW)
6	58" [1473.2]	54" [1371.6]	+9 (CW)




 $\langle 8 \rangle$ Closing time of 3-7 seconds is typical.

More time may be needed for ADA/BF access.

Clockwise (CW) = SLOWER.

Counter-clockwise (CCW) = FASTER. **DO NOT REMOVE VALVES**




INSTRUCTION: 719353

09-06-19

REV. 3


- 1. Use hex key provided.
- 2. Adjust SWEEP (closing max.°- 10°).
- 3. Adjust LATCH (closing 10°-0°).
- 4. Adjust BACKCHECK resistance (opening 70°- max.°). DO NOT COMPLETELY CLOSE VALVE
- 5. Adjust (optional) DELAYED ACTION (closing max.°-70°); Provides additional hesitation for access (ADA/BF) through door.

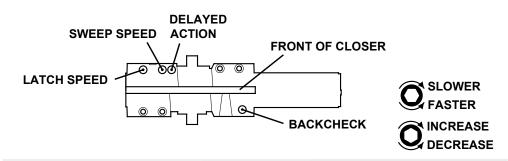



OPTIONAL HOLD OPEN ARM:

Important: DO NOT use arm as limiting stop, separate dead stop is required. Friction HO arm is not recommended for doors frequently operated in/out of hold open




- 1. Install hold-open foot/nut.
 - Left Hand (LH) door = Nut points down. Right Hand (RH) door = Nut points up.
- 2. Loosen HO nut.
- 3. Open door several degrees before HO position.
- 4. Tighten nut.



INSTALL COVER:

- 10 1. Remove correct tab so cover slides over spindle.
 - 2. Install cover over closer.
 - 3. Secure with screws provided.





PDQ Manufacturing 2230 Embassy Dr. Lancaster, PA 17603 833-273-7832 833-2 PDQTECH www.pdqlocks.com