



MJ Series Mortise Deadbolts



SHOWN WITH STANDARD THUMBTURN


Specifications

- FOR DOORS:** • 1-3/4"
- BACKSET:** • 2-3/4"
- CASE:** • Steel—Dichromated for corrosion resistance.
- FACEPLATE:** • 1-1/4" x 5-5/8"
- FRONT:** • 2-1/4" x 1" • Stainless Steel or Wrought Brass
- STRIKE:** • 1-1/8" x 3-1/2"
- DEADBOLT:** • 1" Throw • Stainless Steel
- THUMBTURN:** • ADA Compliant **134LH & 134RH thumbturn varies from standard thumbturn - it is not ADA Compliant**
- HAND:** • Non-handed except for function MJ134 Classroom (See Function Table and How to Order Guide).
- KEYS:** • Two (2) per Lock
- KEYWAYS:** • SCC standard (Schlage C Compatible) • Also available in keyways of other manufacturers
- INTERCHANGEABLE**
 - CORE:** • 6 or 7-pin • Compatible with Best, Falcon & Arrow • Large Format IC Cores compatible with Schlage.
 - CYLINDER:** • 6 or 7-pin Mortise Cylinder
 - KEYING:** • Options: MK, CMK or GMK • Zero Bitted (KO), Keyed Different (KD) or Keyed Alike (KA)
 - Can be keyed into existing master key systems
 - 630 (US32D) - Satin Stainless Steel
- FINISHES:**
- CERTIFICATIONS,**
- LISTINGS, COMPLIANCES:** • ANSI/UL 10C Listed, "Positive Pressure Fire Tests of Door Assemblies" for up to and including 3 hrs.
- WARRANTY:** • 10-Year Limited Warranty

Cross Reference

ANSI # A156.5 (A156.13)	PDQ FUNCTION	BEST	CORBIN	DORMA	MARKS #31/32/33 SERIES	SARGENT	SCHLAGE	YALE
E06081 (F18)	MJ131	48H L	DL4111	D961	L	4876	L464	353
E06071 (F17)	MJ132	48H K	DL4113	D960	K	4875	L460	352
E06061 (F16)	MJ133	48H M	DL4112	D962	M	4874	L462	351
E06091 (F29)	MJ134LH	48H R	DL4117	D963	S	4877	L463	357
	MJ134LH							


Functions

FUNCTION	FUNCTION NUMBER	OUTSIDE INSIDE	DESCRIPTION	ANSI NUMBER
Single Cylinder Deadbolt	MJ131		• Key outside extends/retracts deadbolt	F18
Cylinder and Thumbturn Deadbolt	MJ132		• Key outside extends/retracts deadbolt • Thumbturn inside extends/retracts deadbolt	F17
Double Cylinder Deadbolt	MJ133		• Key outside extends/retracts deadbolt • Key inside extends/retracts deadbolt	F16
Classroom Deadbolt	MJ134		• Key outside extends/retracts deadbolt • Inside cylinder turn retracts but does not extend deadbolt • Not field reversible • Specify handing 	F29
Single Cylinder Deadbolt w/Indicator (Privacy)	MJ232		• Key outside extends/retracts deadbolt • Thumb turn inside extends/retracts deadbolt • Indicator outside displays: • Occupied when deadbolt is projected • Vacant when deadbolt is retracted • Indicator, outside — (VACANT/OCCUPIED)	—

SERIES	FINISH	CYLINDER OR HOUSING	KEYING
MJ — Mortise Deadbolts	630 — Satin Stainless Steel	D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schalgé® Compatible LFIC w/ Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing, less core LFL — Schalgé® Compatible LFIC Housing less core	KD — Keyed Different (Default) Others - See Keying Table
MJ 131	630 —	D SCC	KD
See Function Table	ADA — ADA Compliant Thumbturn	SCC — Default Others - See Keyway Table	
FUNCTION NUMBER	THUMBTURN	KEYWAY	

Ordering Example: MJ 131 630 SCC KD

Cylinder Reference Guide

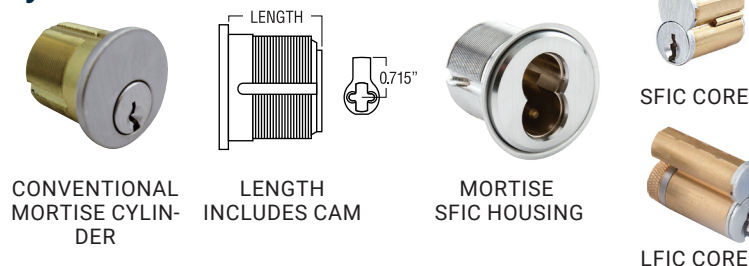

TYPE	LENGTH	PDQ CAM NUMBER
Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231

Keyways

CONVENTIONAL CYLINDER		SMALL FORMAT INTERCHANGEABLE CORE		LARGE FORMAT INTERCHANGEABLE CORE	
KEYWAY	PDQ KEYWAY DESIGNATOR	KEYWAY (BEST COMPATIBLE)	PDQ KEYWAY DESIGNATOR	KEYWAY (SCHLAGE COMPATIBLE)	PDQ KEYWAY DESIGNATOR
Schlage C (Default)	SCC	BEST A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	A (Default), B, C, D, E, F, G, H, J, K, L, M, Q, R, WA, WB, WG, WH, TB, TD, TE, R	Schlage C (Default)	SCC
				PDQ Restricted	TA
PDQ Restricted	TA				
Arrow AR1	AR1				
Corbin 59A1	CO59A1				
Corbin 60	CO6	PDQ Exclusive	PDQ1		
Corbin L4	CL4		PDQ2		
Russwin D1	RUD		PDQ3		
Russwin 981	RUD981	PDQ Exclusive and Re-restricted			
Schlage E	SCE				
Schlage C	SCC				
Schlage C-K	SCC-K				
Sargent LA	SAL				
Sargent RA-RC	RA-RC				
Yale E1R	YA8				
Yale GA	GA				
Falcon E-R	FAL				
Kwikset	KW				


DESCRIPTION	PDQ KEYING DESIGNATOR
Keyed Different (Default)	KD
Keyed Alike	KA
"0" Zero Bitted	KO
Master Keyed	MK
Construction Master Keyed	CMK
Grand Master Keyed	GMK

Finishes



630 (US32D)
Satin Stainless Steel,
No Coating

Mortise Deadbolt

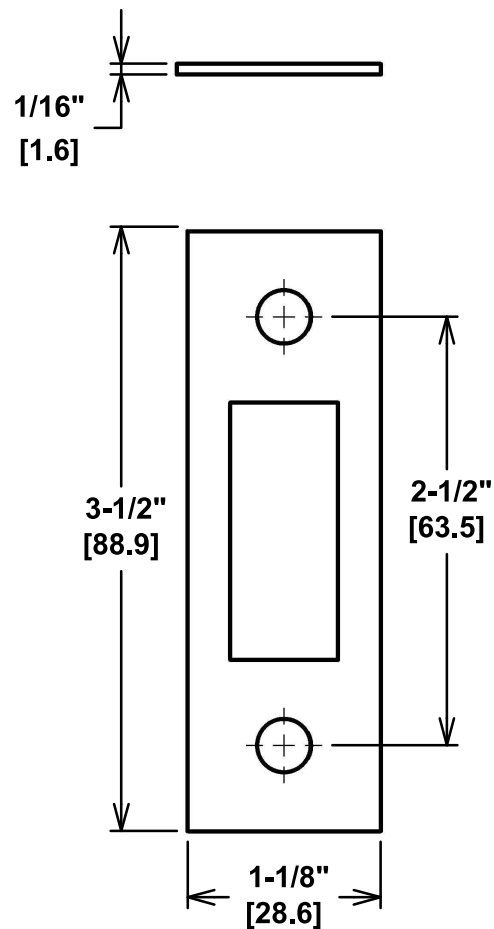



SECURING CONFIDENCE **OPENING POSSIBILITIES**

Phone: 717.656.4281

Tech Support: 800.441.9692

Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA
17603 P.O Box 6426, Lancaster, PA 17607

Regional Distribution Centers: Lancaster, PA | Norcross,
GA | Auburn, WA

Middle East Manufacturing: Dammam, Kingdom of
Saudi Arabia