6300R Series

Commercial Wide Stile Rim Exit Device

Architectural Submittal Sheet











Specifications

Specifications	ADA COMPLIANT					
Rail	• Extruded aluminum • Specify 630F for full stainless surfaces (roll formed)					
Latch	Stainless steel dead locking with 3/4" throw					
Hand	Device is non-handed					
Dogging	Hex key dogging standard Cylinder dogging optional Dogging not available for fire labeled devices					
Minimum Stile Width	• 6300 - 3-1/2" • 6400 - 2-1/8"					
Door Thickness	• 1-3/4" - 2" (Consult factory for other)					
Door Width	• 24", 36", 48" standard					
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 3					
Strike Options	Default roller Blade stop Double door Windstorm/Fire Mullion - Panic Mullion uses standard roller strike					
Finishes	605 - Polished Brass, 606 - Satin Brass, 613 - Dark Bronze, 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F — Full Satin Stainless Surfaces Optional Anti Microbial Coating available on 626, 630 & 630F					
Fasteners	Includes machine and wood screws					
Warranty	• Ten (10) year limited warranty					
Electrified Options	Motorized Latch Retraction Request to Exit/Signal Switch Alarmed Exit Latch Bolt Monitor ISMC Connectors					
Certifications: Compliances: Listings:	Compliances: • FL #40297 +50/-50 psf 4080 18ga Single					



6300R Series

6300R Rim Wide Stile Exit Devices

PART	DESCRIPTION
6300R	Rim, Listed to UL305 for Panic, hex key dogging, 3'0" door
6300RF	Rim, Listed to UL10C for Fire, no dogging 3'0" door
6310R	Rim, Listed to UL305 for Panic, hex key dogging, 4'0" door
6310RF	Rim, Listed to UL10C for Fire, no dogging 4'0" door
6320R	Rim, Listed to UL305 for Panic, no dogging, 2'0" door
6320RF	Rim, Listed to UL10C for Fire, no dogging 2'0" door

Available with all electrified options.

6300R Rim Mechanical Options

PART	DESCRIPTION
EC	End Cap Cover
TLA	Head Cover (Similar to 6200 Series)
AM	Anti Microbial (630/626 only)
WS	Florida HVHZ
CD	Cylinder Dogging
LD	Less Dogging
SNB	Sex Nuts & Bolts
BS	Blade Stop Strike
DD	Double Door Strike
SHS	Tamper Proof Security Head Screws

6300R Rim Electrical Options

PART	DESCRIPTION	
AL	Alarmed Exit	
LM	Latch Bolt Monitoring	
MLR	Motorized Latch Retraction	
SS	Signal Switch - Request to Exit or touch bar Monitoring	
ALHW	Alarmed Exit with Hard Wire Power and Relay	
ISMC	Industry Standard Molex Connector (order in addition to other electrified options)	




6300R Series

6300RF Rim Devices

		RATING	MAX OPENING	APPLICATION
0	Single Door	3 Hour Rated	4' x 10' Door	
D	Double Door with 9300F Mullion	3 Hour Rated	8' x 8' Pair	Single Egress Pairs (Swing Same Direction)

6300 Series Wide Stile

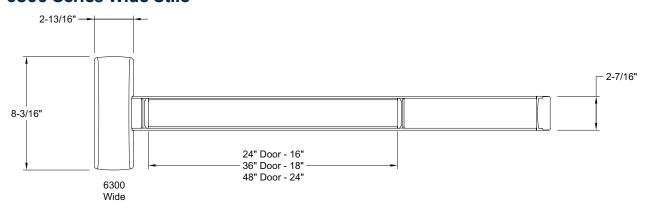



6300R Series

Finishes

605

Bright Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler Polished brass plated cast head cover and end caps. Polished brass plated heavy gauge stamped push bar face.

606

Satin Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler Brushed brass plated cast head cover and end caps. Brushed brass plated heavy gauge stamped push bar face.

613

Dark Bronze

Dark bronze anodized aluminum rail, push bar sides and dogging filler Powder coated cast head cover and end caps. Powder coated heavy gauge stamped push bar face.

622

Flat Black

Black anodized aluminum rail, push bar sides and dogging filler Powder coated cast head cover and end caps. Powder coated heavy gauge stamped push bar face

625

Bright Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging filler Polished chrome plated cast head cover and end caps. Polished chrome plated heavy gauge stamped push bar face.

626

Satin Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging filler Brushed chrome plated cast head cover and end caps. Brushed chrome plated heavy gauge stamped push bar face.

630

Satin Stainless

Clear anodized aluminum rail (matte), push bar sides and dogging filler Plated (stainless look) cast head cover and end caps. Brushed stainless heavy gauge stamped push bar face.

630F

Full Satin Stainless

Brushed stainless fully clad rail, push bar and dogging filler Plated (stainless look) cast head cover and end caps.

