

6400C Series

Commercial Narrow Stile Concealed Vertical Rod Exit Device

Architectural Submittal Sheet



ADA COMPLIANT

Specifications

Rail	• Extruded aluminum • Specify 630F for full stainless surfaces (roll formed)
Latch	• Top - Stainless Steel 3/4" toggle • Bottom - 5/8" Travel Drop Bolt • Less bottom rod option
Hand	• Device is non-handed • Trim is non-handed or field reversible
Dogging	• Hex key dogging standard • Cylinder dogging optional • Dogging not available for fire labeled devices
Minimum Stile Width	• 6300 - 3-1/2" • 6400 - 3 1/8" with 639027/639057 strike and 2 1/8" on aluminum frames with balde stop strike.
Door Thickness	• 1-3/4" - 2" (Consult factory for other)
Door Width	• 24", 36", 48" standard
Door Height	• Panic - Up to 10' • Fire - See fire ratings charts page 4
Strike	• Cast top strike, plate bottom strike
Finishes	• 605 - Polished Brass, 606 - Satin Brass, 613 - Dark Bronze, 622 - Flat Black, 626 - Satin Chrome, 630 - Satin Stainless Steel, 630F - Full Satin Stainless Surfaces • Optional Anti-Microbial Coating available on 626, 630 & 630F
Fasteners	• Includes machine screws and wood screws • SNB Optional
Warranty	• Ten (10) year limited warranty
Electrified Options	• Motorized Latch Retraction • Request to Exit/Signal Switch • Alarmed Exit • Latch Bolt Monitor • ISMC Connectors
Certifications: Compliances: Listings:	• Listed for UL 305 "Panic", listed for UL 10C "Fire Exit Hardware" up to 3 hours. • ANSI/BHMA A156.3 Grade 1 Pending • Complies with ADA (Americans with Disabilities Act) and ICC/ANSI 117.1 for Accessible and Usable Buildings • Meets requirements of the BAA as a COTS product manufactured in the United States

6400C Series

6400C Narrow Stile Concealed Vertical Rod Exit Devices

PART	DESCRIPTION
6400C	Concealed vertical rod, Listed to UL305 for Panic, hex key dogging, 3'0" door
6400CLBR	Concealed vertical rod, less bottom rod, Listed to UL305 for Panic, hex key dogging, 3'0" door
6400CF	Concealed vertical rod, Listed to UL10C for Fire, no dogging, 3'0" door
6400CFLBR*	Concealed vertical rod, less bottom rod, Listed to UL10C for Fire, no dogging, 3'0" door
6410C	Concealed vertical rod, Listed to UL305 for Panic, hex key dogging, 4'0" door
6410CLBR	Concealed vertical rod, less bottom rod, Listed to UL305 for Panic, hex key dogging, 4'0" door
6410CF	Concealed vertical rod, Listed to UL10C for Fire, no dogging, 4'0" door
6410CFLBR*	Concealed vertical rod, less bottom rod, Listed to UL10C for Fire, no dogging, 4'0" door
6420C	Concealed vertical rod, Listed to UL305 for Panic, no dogging, 2'0" door
6420CLBR	Concealed vertical rod, less bottom rod, Listed to UL305 for Panic, no dogging, 2'0" door
6420CF	Concealed vertical rod, Listed to UL10C for Fire, no dogging, 2'0" door
6420CFLBR*	Concealed vertical rod, less bottom rod, Listed to UL10C for Fire, no dogging, 2'0" door

*LBR FIRE RATED DEVICES MUST BE ORDERED IN PAIRS. One fire pin furnished per pair.

6400C Series

6400C Concealed Vertical Rod Mechanical Options


PART	DESCRIPTION
EC	End Cap Cover
TLA	Head Cover (Similar to 6200 Series)
AM	Anti Microbial (630/626 only)
CD	Cylinder Dogging
LD	Less Dogging
SNB	Sex Nuts & Bolts
SHS	Tamper Proof Security Head Screws
LBR	Less Bottom Rod
LBR-FP	Less Bottom Rod with Fire Pin (used with fire rated pair)

6400C Concealed Vertical Rod Electrical Options


PART	DESCRIPTION
AL	Alarmed Exit
LM	Latch Bolt Monitoring
MLR	Motorized Latch Retraction
SS	Signal Switch - Request to Exit and Monitoring
ALHW	Alarmed Exit with Hard Wire Power and Relay
ISMC	Industry Standard Molex Connector (order in addition to other electrified options)

6400C Series

6400CF Concealed Vertical Devices

		RATING	MAX OPENING	APPLICATION
	Double Door Top/Btm Latches or Less Bottom Rod (LBR)	3 Hour Rated	8' x 8' Pair	Single Egress Pairs (Swing Same Direction)
	Double Door Top/Btm Latches or Less Bottom Rod (LBR)	3 Hour Rated	8' x 8' Pair	Double Egress Pairs (Swing Opposite Directions)

6400 Series Narrow Stile

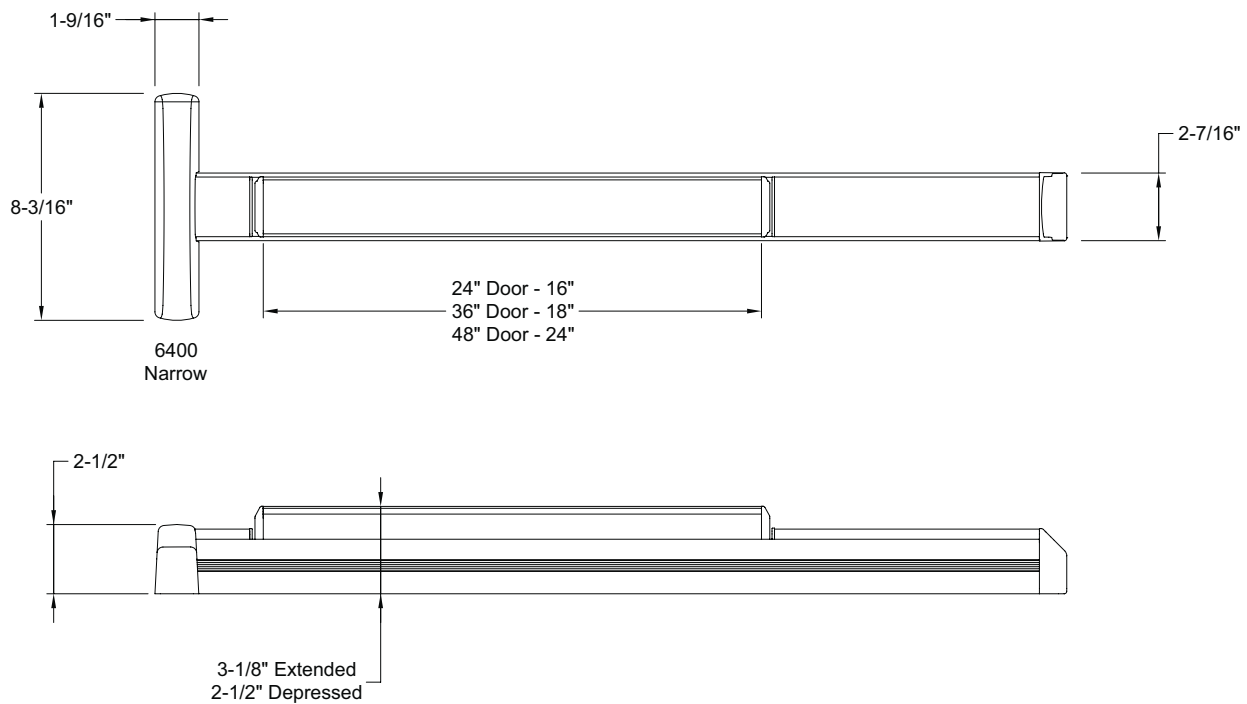

6400C Series

Finishes

605

Bright Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler
filler Polished brass plated cast head cover and end caps. Polished
brass plated heavy gauge stamped push bar face.

606

Satin Brass

Gold anodized aluminum rail (matte), push bar sides and dogging filler
Brushed brass plated cast head cover and end caps. Brushed brass
plated heavy gauge stamped push bar face.

613

Dark Bronze

Dark bronze anodized aluminum rail, push bar sides and dogging filler
Powder coated cast head cover and end caps. Powder coated heavy
gauge stamped push bar face.

622

Flat Black

Black anodized aluminum rail, push bar sides and dogging filler
Powder coated cast head cover and end caps. Powder coated heavy
gauge stamped push bar face

625

Bright Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging
filler Polished chrome plated cast head cover and end caps. Polished
chrome plated heavy gauge stamped push bar face.

626

Satin Chrome

Clear anodized aluminum rail (matte), push bar sides and dogging
filler Brushed chrome plated cast head cover and end caps. Brushed
chrome plated heavy gauge stamped push bar face.

630

Satin Stainless

Clear anodized aluminum rail (matte), push bar sides and dogging
filler Plated (stainless look) cast head cover and end caps. Brushed
stainless heavy gauge stamped push bar face.

630F

Full Satin Stainless

Brushed stainless fully clad rail, push bar and dogging filler Plated
(stainless look) cast head cover and end caps.

